



US006375885B1

(12) **United States Patent**
Leddy et al.

(10) **Patent No.:** **US 6,375,885 B1**
(45) **Date of Patent:** **Apr. 23, 2002**

(54) **METHODS FOR COATING SURFACES WITH MAGNETIC COMPOSITES EXHIBITING DISTINCT FLUX PROPERTIES**

(75) Inventors: **Johna Leddy; Sudath Amarasinghe,**
both of Iowa City, IA (US)

(73) Assignee: **The University of Iowa Research Foundation,** Iowa City, IA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/122,861**

(22) Filed: **Jul. 27, 1998**

Related U.S. Application Data

(62) Division of application No. 08/626,082, filed on Apr. 1, 1996, now Pat. No. 5,786,040, which is a division of application No. 08/294,797, filed on Aug. 25, 1994, now abandoned.

(51) **Int. Cl.⁷** **B29C 39/10**

(52) **U.S. Cl.** **264/427;** 264/113; 264/255;
264/309; 264/310; 427/131; 427/407.1

(58) **Field of Search** 264/308, 309,
264/113, 437, 427, 250, 216, 310, 311,
255, 428; 427/131, 132, 407.1

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,895,851 A	7/1959	Johnson	427/598
3,853,628 A	12/1974	Fox	136/86
3,945,910 A	3/1976	De Ceuster et al.	204/296
4,037,022 A	7/1977	Cheron	429/10
4,201,827 A	5/1980	Heitkamp	428/283
4,244,998 A	1/1981	Smith	428/195
4,247,398 A	1/1981	Mohri	210/222
4,293,371 A	10/1981	Kokta et al.	156/624
4,336,278 A	6/1982	Pertzsch et al.	427/598
4,339,337 A	7/1982	Tricot et al.	252/62.54
4,647,514 A	3/1987	Le Craw et al.	428/692
4,725,490 A	2/1988	Goldberg	428/292
4,965,007 A	10/1990	Yudelson	252/62.53
4,973,391 A	11/1990	Madou et al.	204/78
5,075,169 A	12/1991	Nagai et al.	428/402

5,096,551 A	3/1992	Schoen et al.	204/131
5,102,745 A	4/1992	Tatarchuk et al.	428/605
5,145,614 A	* 9/1992	Kuroda	264/24
5,172,751 A	12/1992	Croat	148/101
5,186,854 A	2/1993	Edelstein	252/62.55
5,187,034 A	2/1993	Otagawa et al.	429/198
5,191,223 A	3/1993	Munekata	257/421
5,241,447 A	8/1993	Barber et al.	361/141
5,391,329 A	* 2/1995	Dougherty et al.	264/1.7
5,540,981 A	7/1996	Gallagher et al.	428/230
5,587,943 A	12/1996	Torok et al.	365/158
5,648,039 A	* 7/1997	Taguchi et al.	264/428
5,696,392 A	12/1997	Char et al.	257/190
5,928,804 A	7/1999	Leddy et al.	429/10
5,951,937 A	* 9/1999	Taguchi et al.	264/427
6,001,500 A	* 12/1999	Bass et al.	429/31
6,036,838 A	3/2000	Wieser et al.	205/339

OTHER PUBLICATIONS

Burstall, F.H. and Nyholm, R.S., *Studies in Co-ordination Chemistry, Part XIII. Magnetic Moments and Bond Types of Transition-metal Complexes*, J. Chem. Soc. pp. 3570-3579 (1972).

Cotton, F.A. and Wilkinson, G., *Advanced Inorganic Chemistry*, Third Edition, Interscience Publisher New York, 1972, pp. 329, 369.

Figgis, B.N. and Lewis, J., *The Magnetic Properties of Transition Metal Complexes*, in *Progress in Inorganic Chemistry*, vol. 6, Cotton, F.A., ed., Interscience Publishers, New York, 1964, pp. 37-239.

* cited by examiner

Primary Examiner—Jan H. Silbaugh


Assistant Examiner—Edmund H. Lee

(74) *Attorney, Agent, or Firm*—Fleshner & Kim, LLP

(57) **ABSTRACT**

A method for coating a surface with a magnetic composite material exhibiting distinct flux properties due to gradient interfaces within the composite. Surfaces coated with such a composite can be used to improve fuel cells and to effect improved transport and separation of different species of materials. A wide variety of devices can incorporate such composite-coated surfaces, including separators, fuel cells, electrochemical cells, and electrodes for channeling flux of, or for effecting electrolysis of, magnetic species.

29 Claims, 26 Drawing Sheets

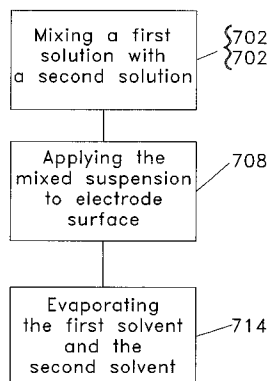

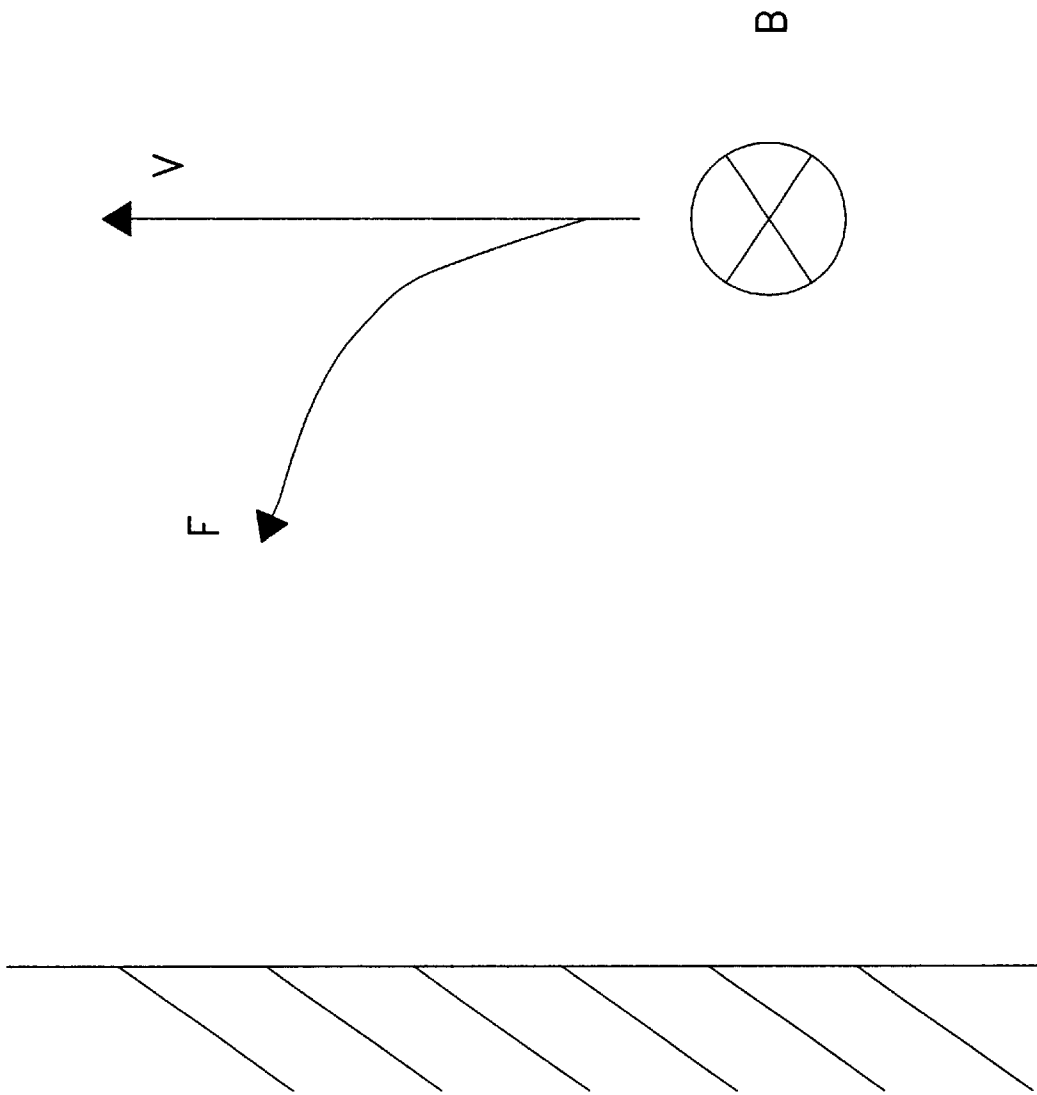


FIG. 1

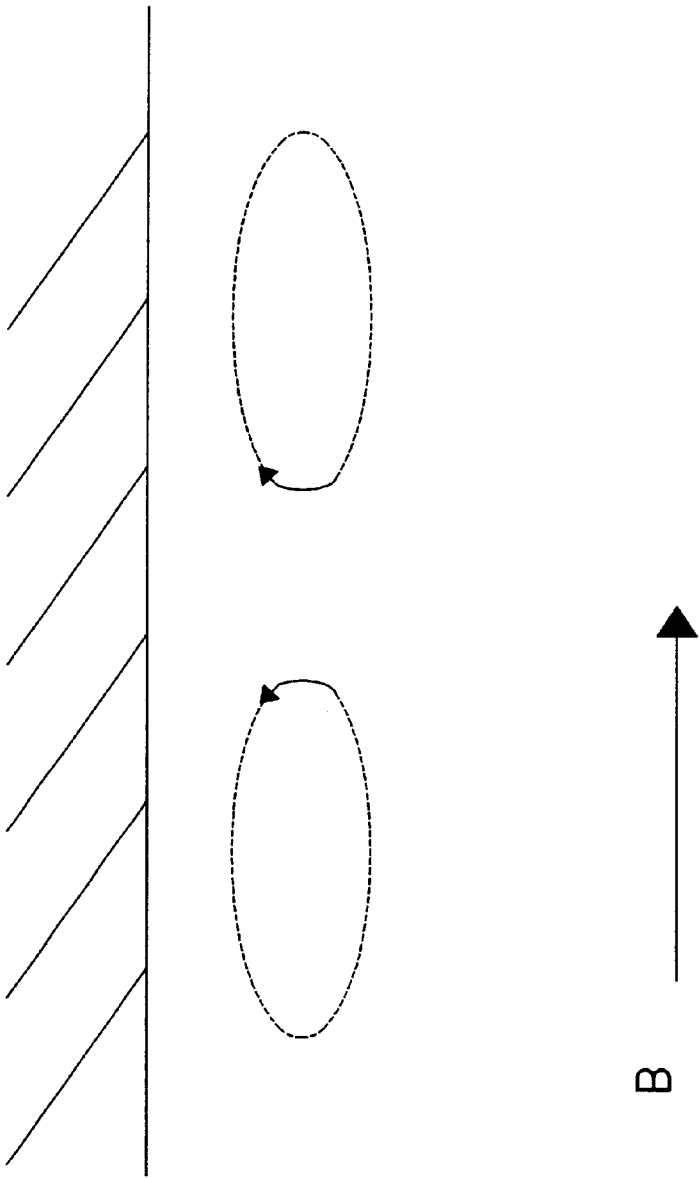


FIG. 2

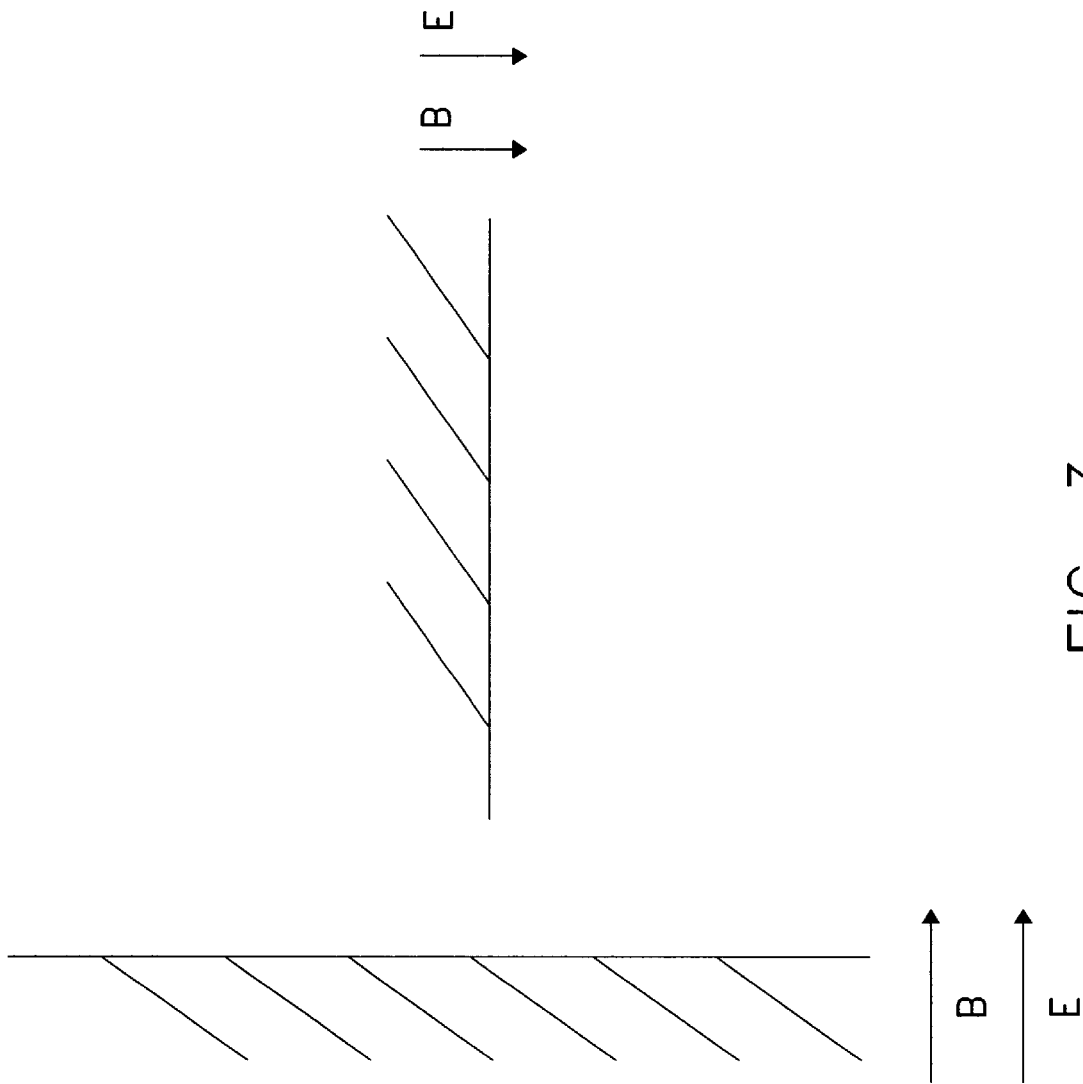


FIG. 3

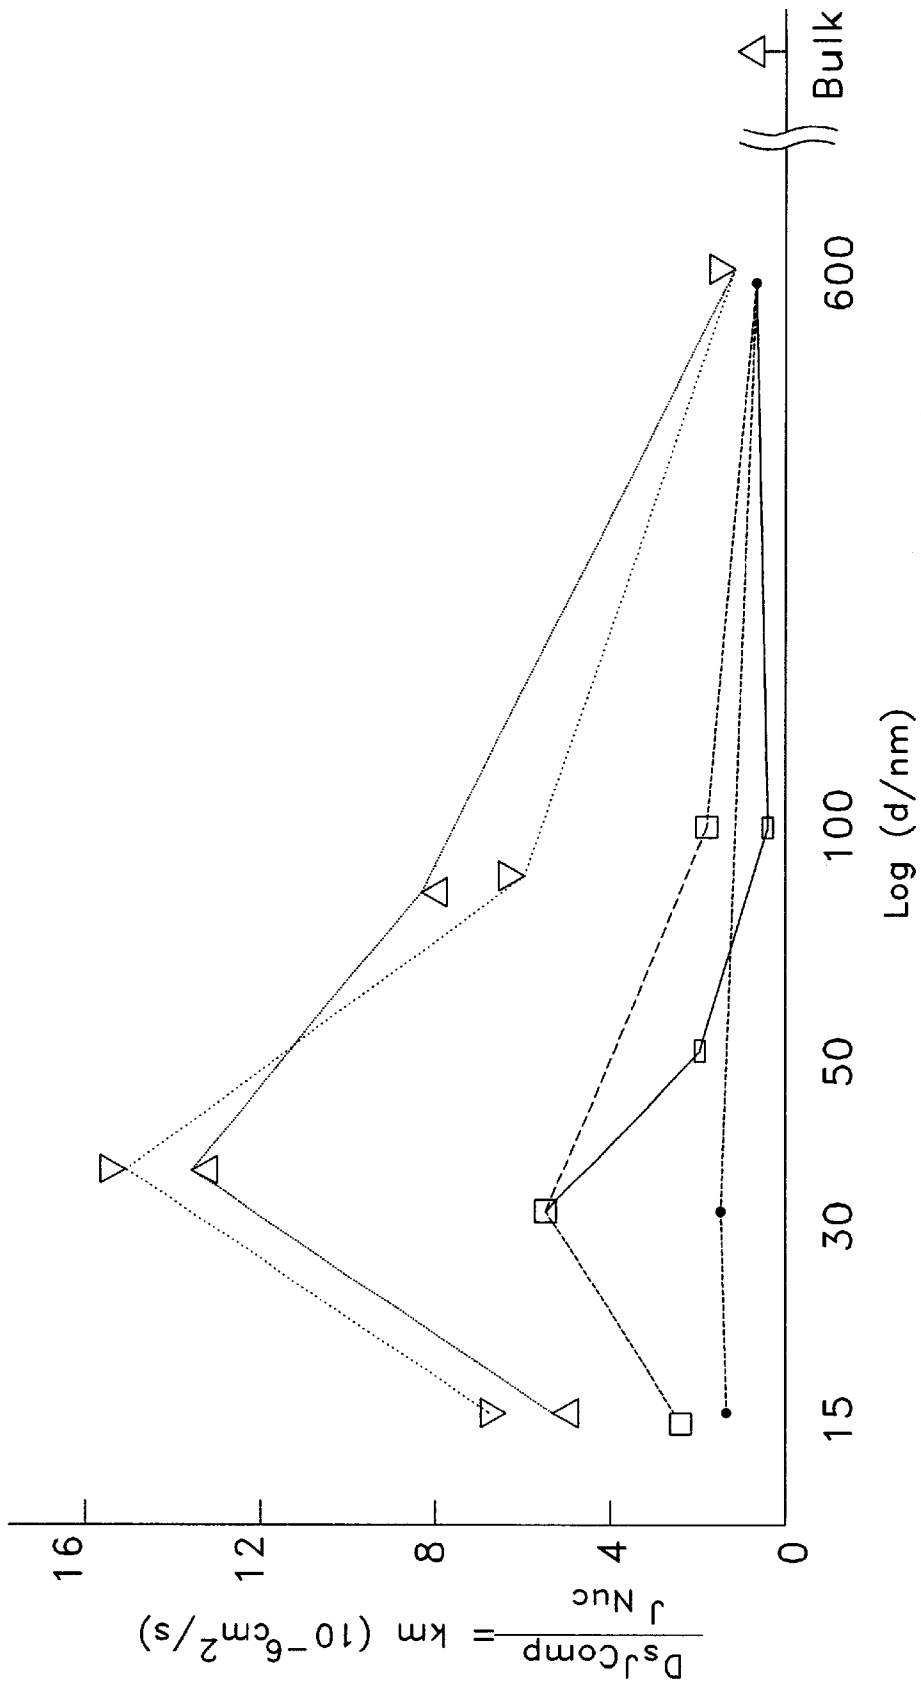


FIG. 4A

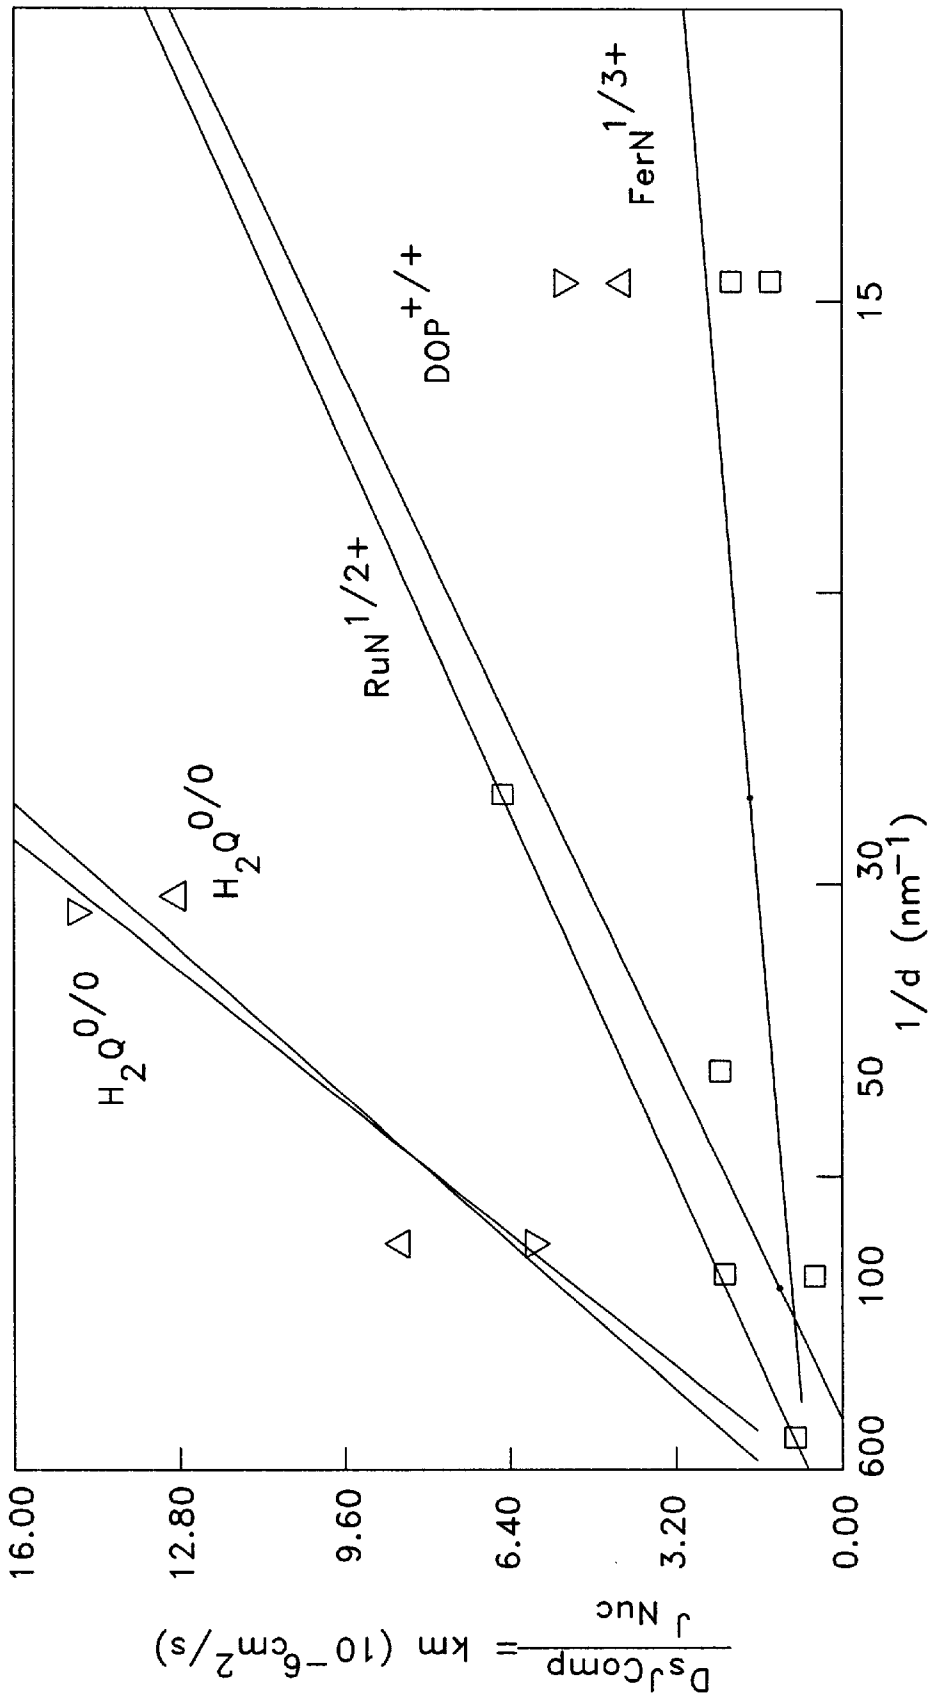


FIG. 4B

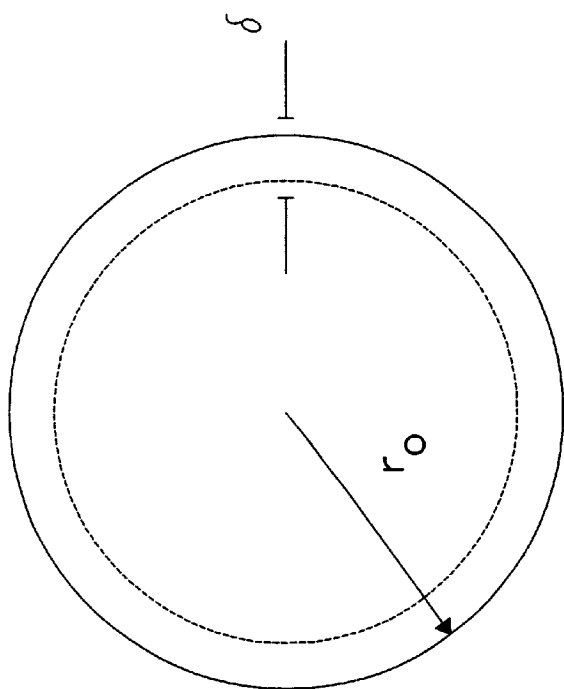


FIG. 5B

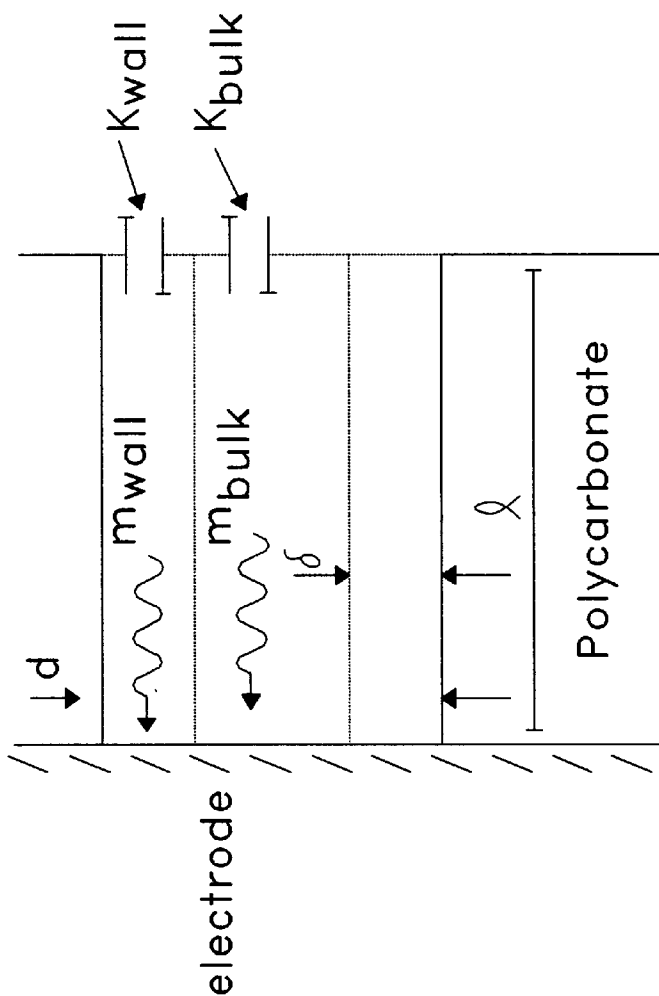


FIG. 5A

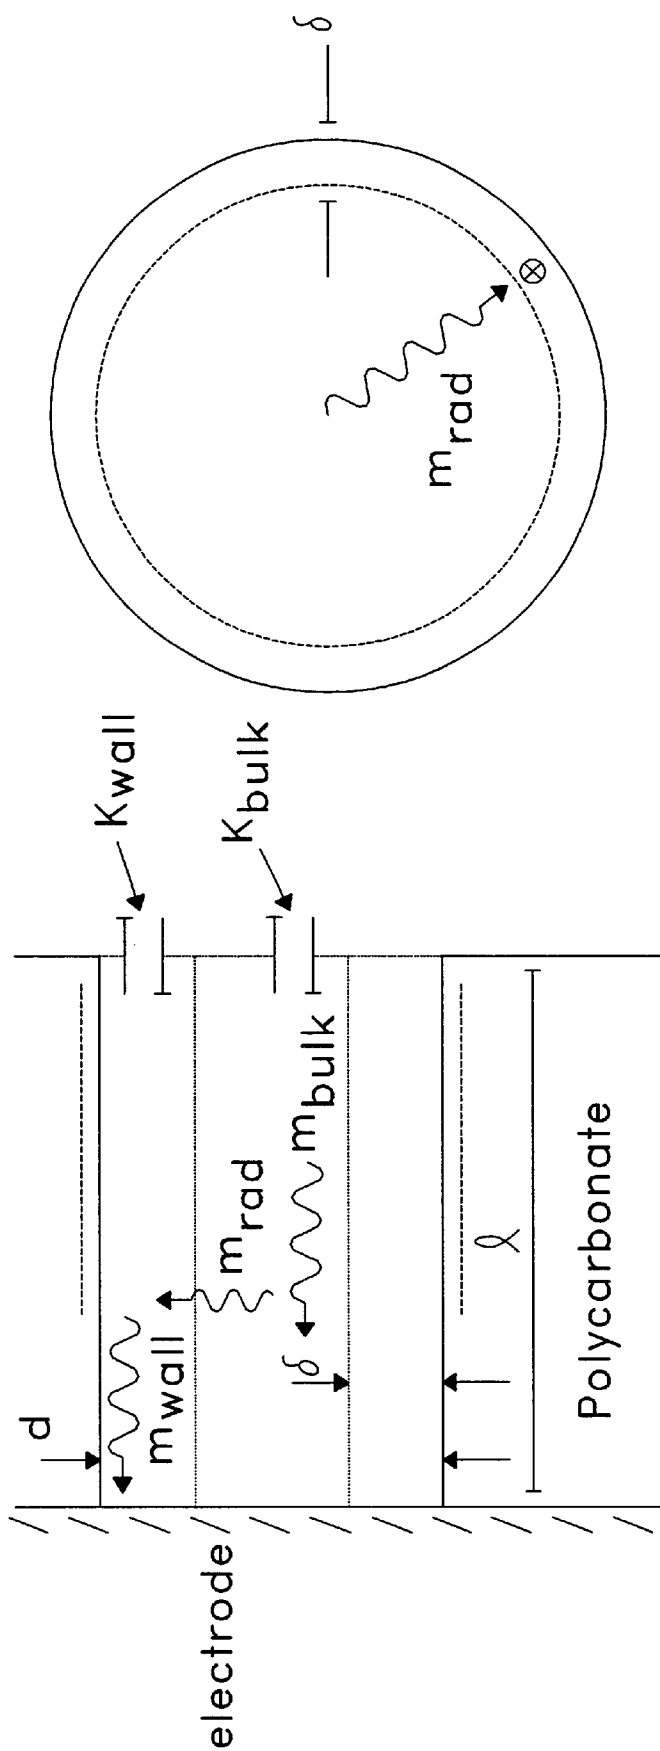


FIG. 6B

FIG. 6A

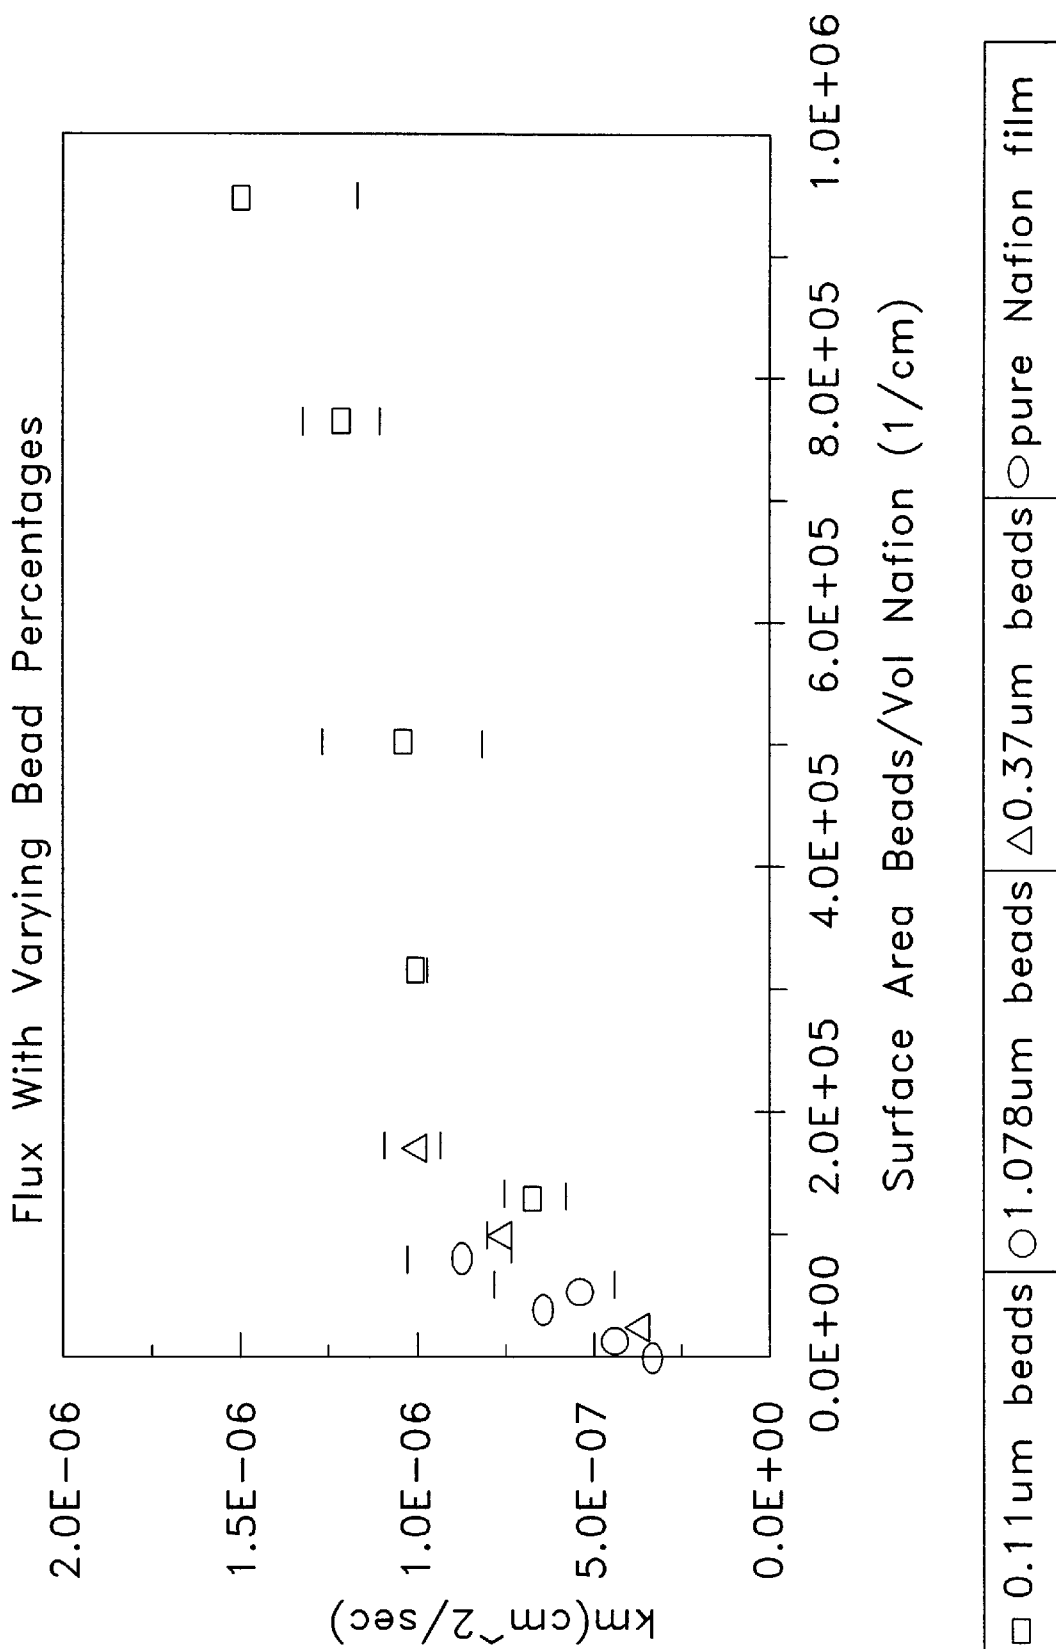


FIG. 7A

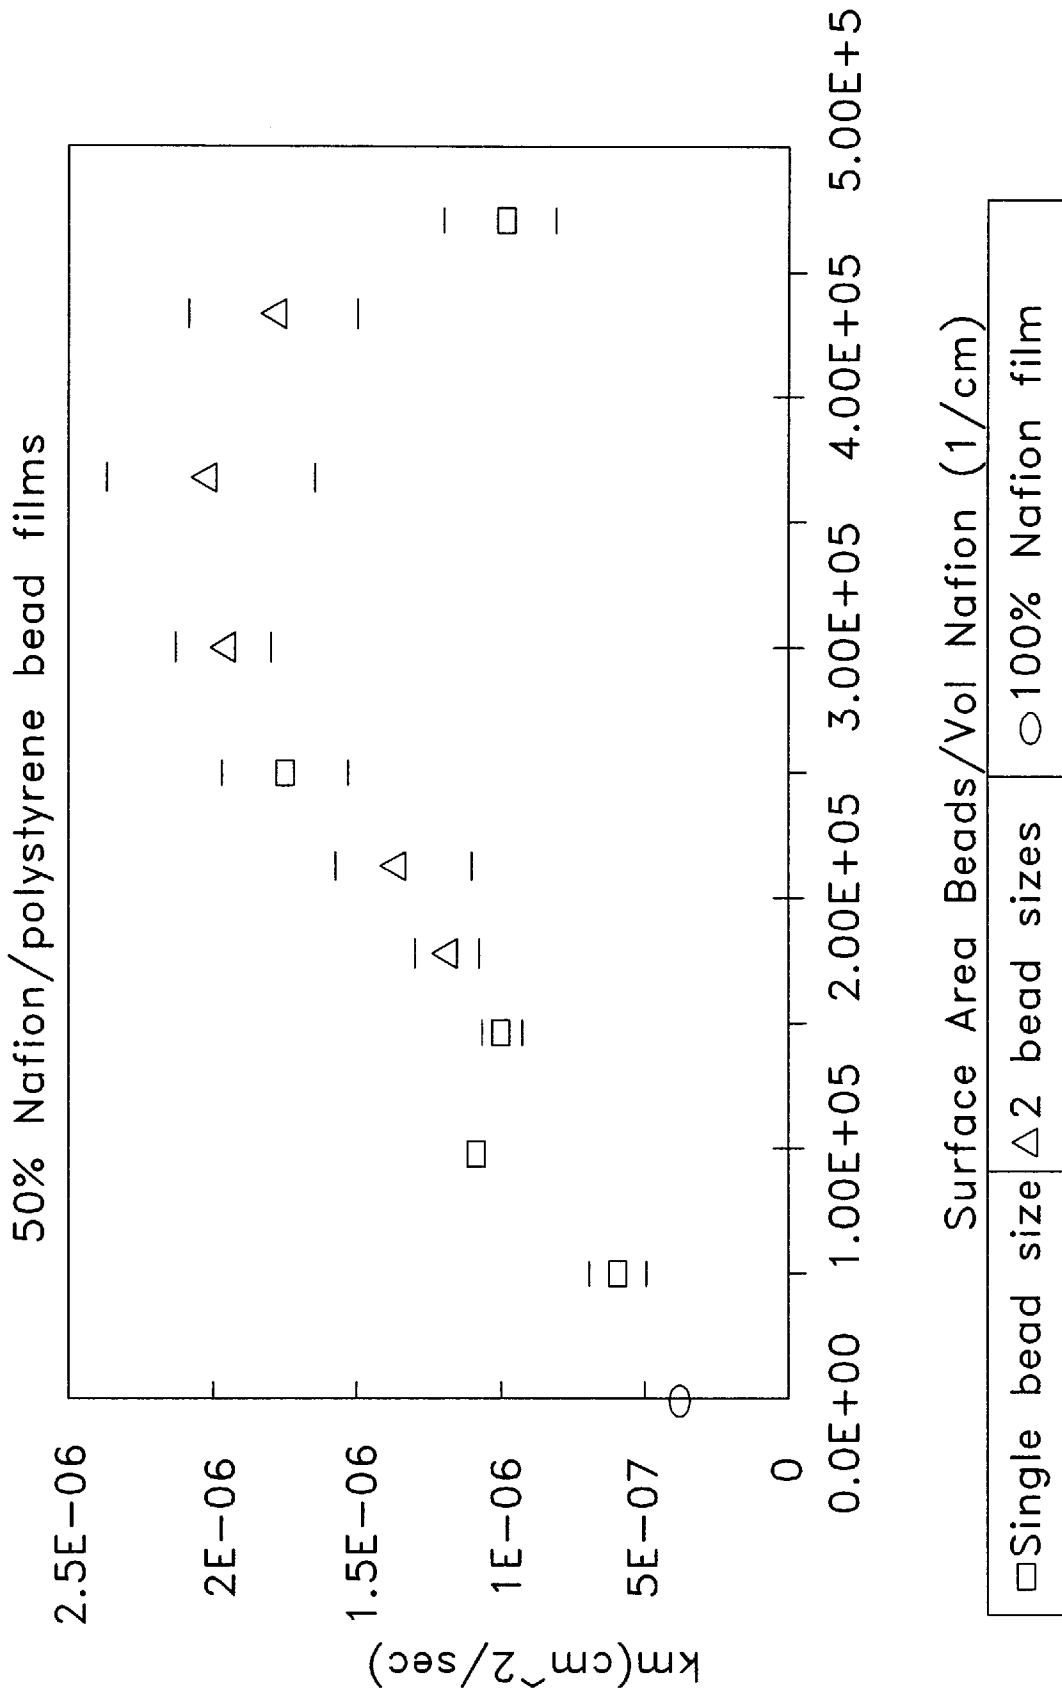


FIG. 7B

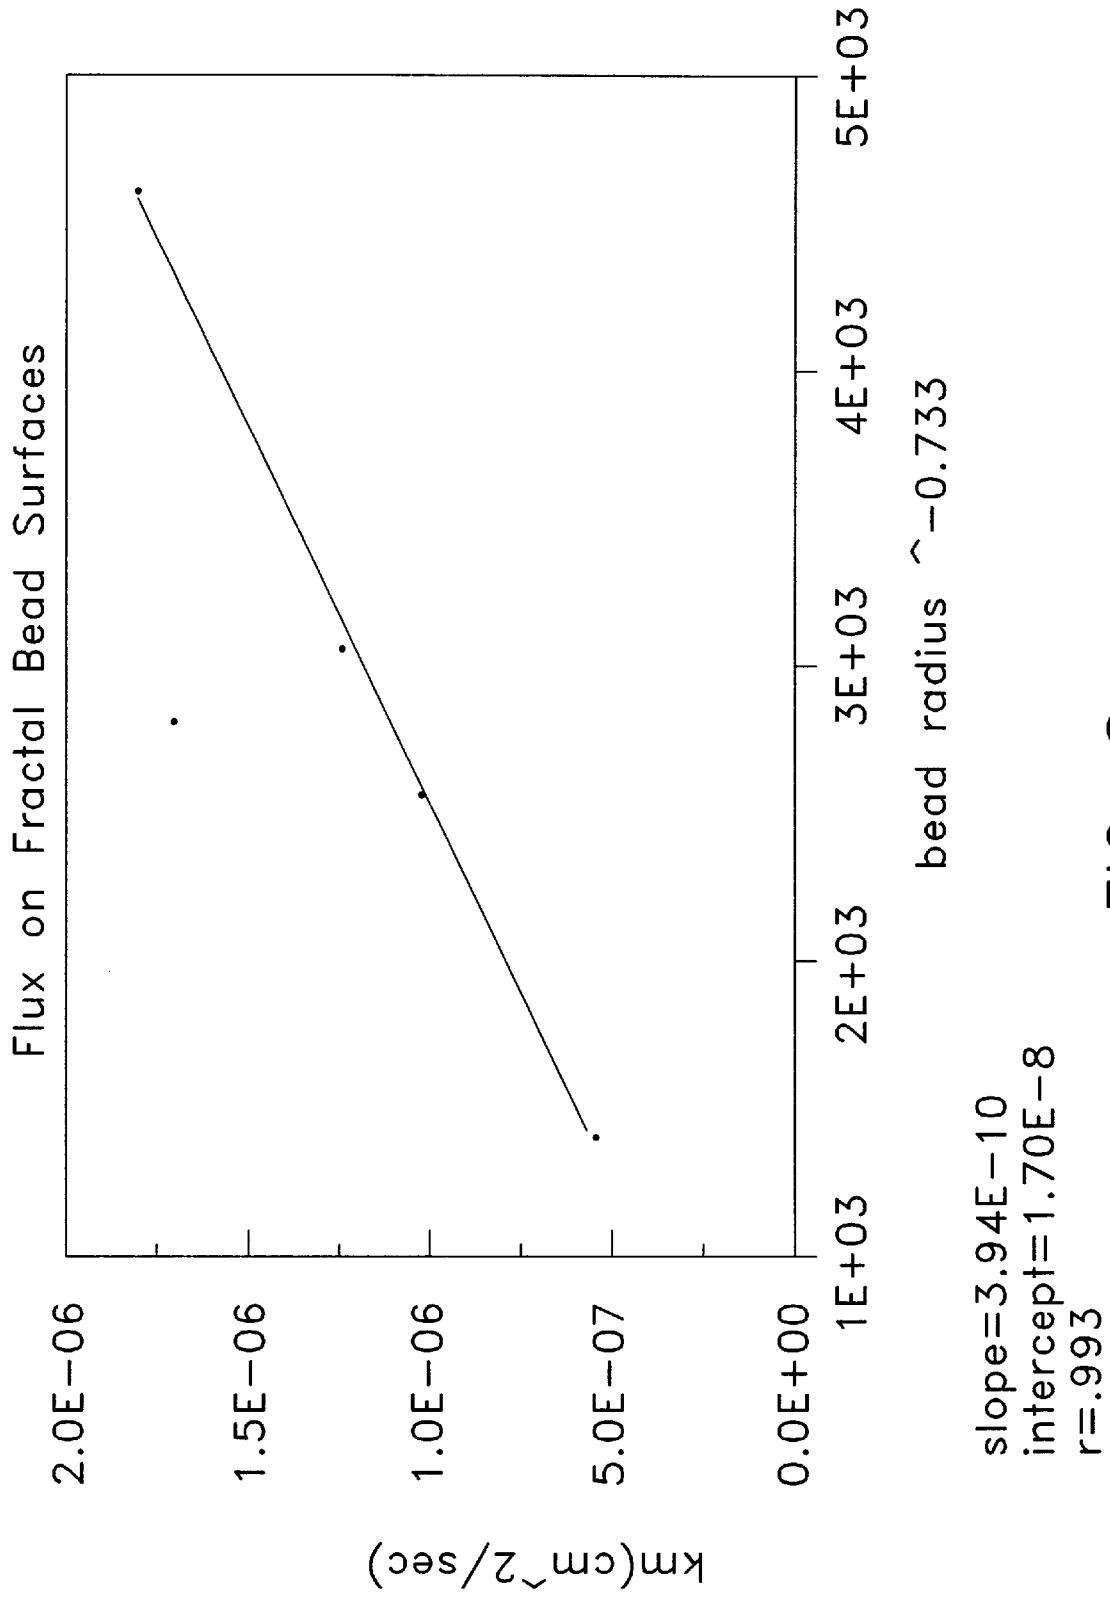


FIG. 8

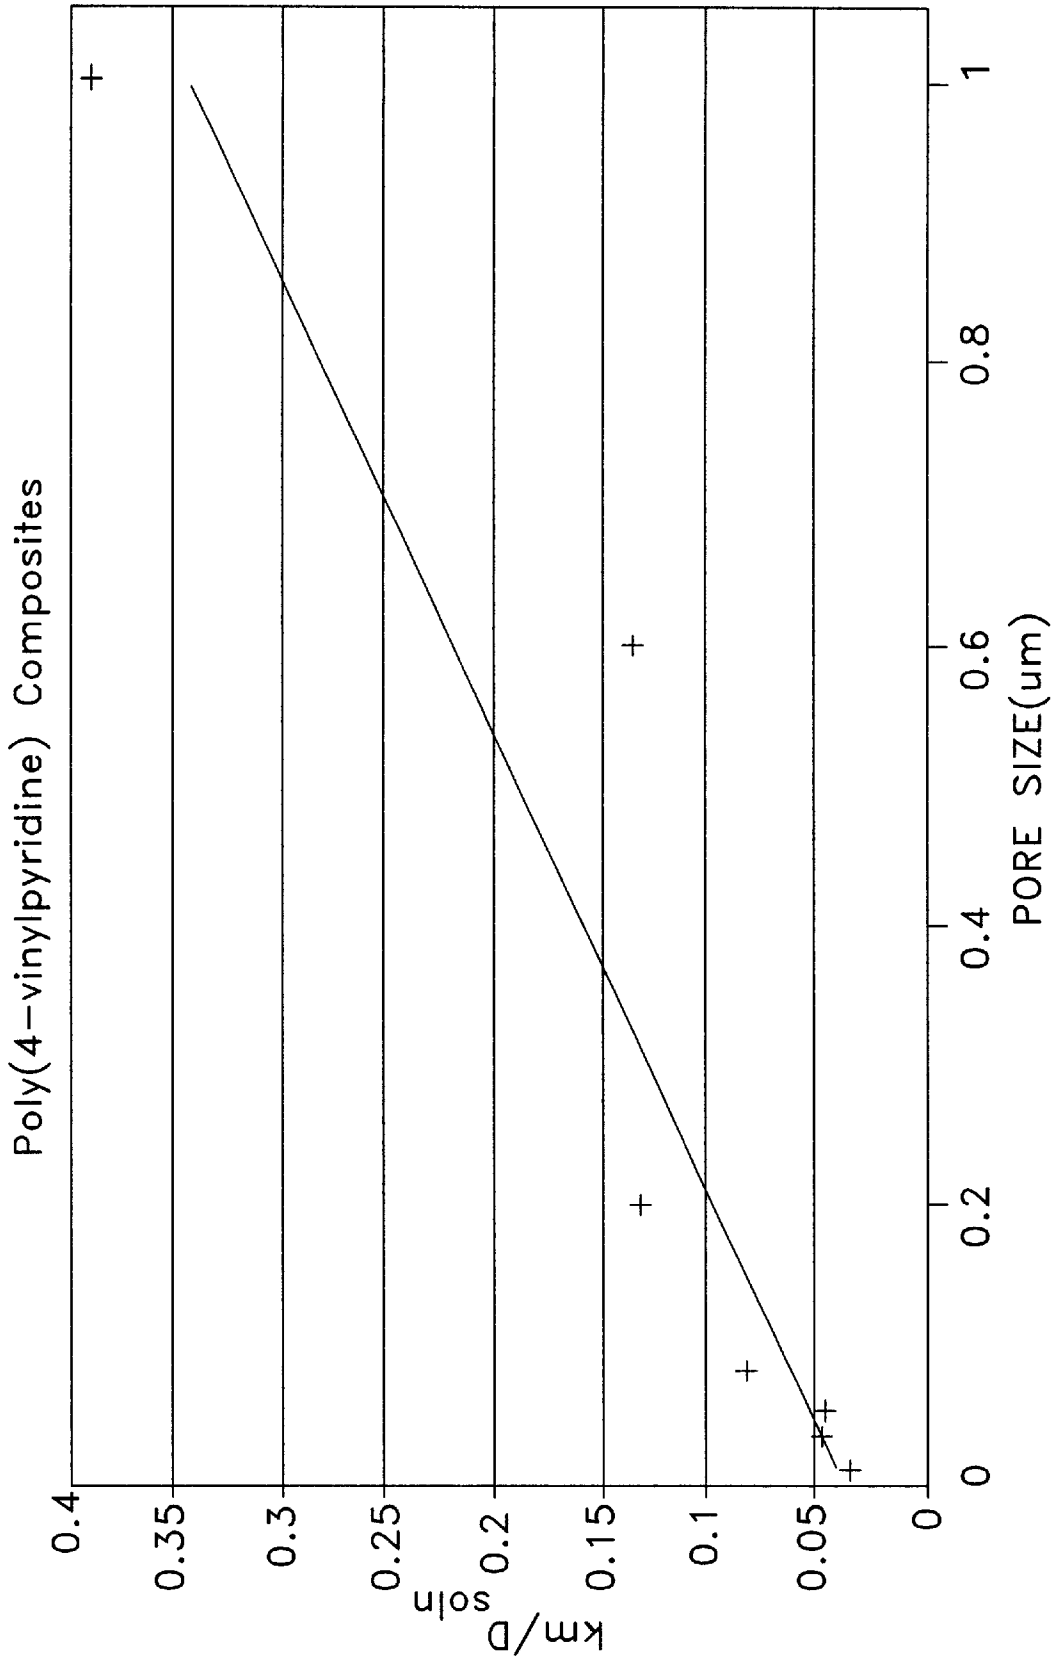


FIG. 9

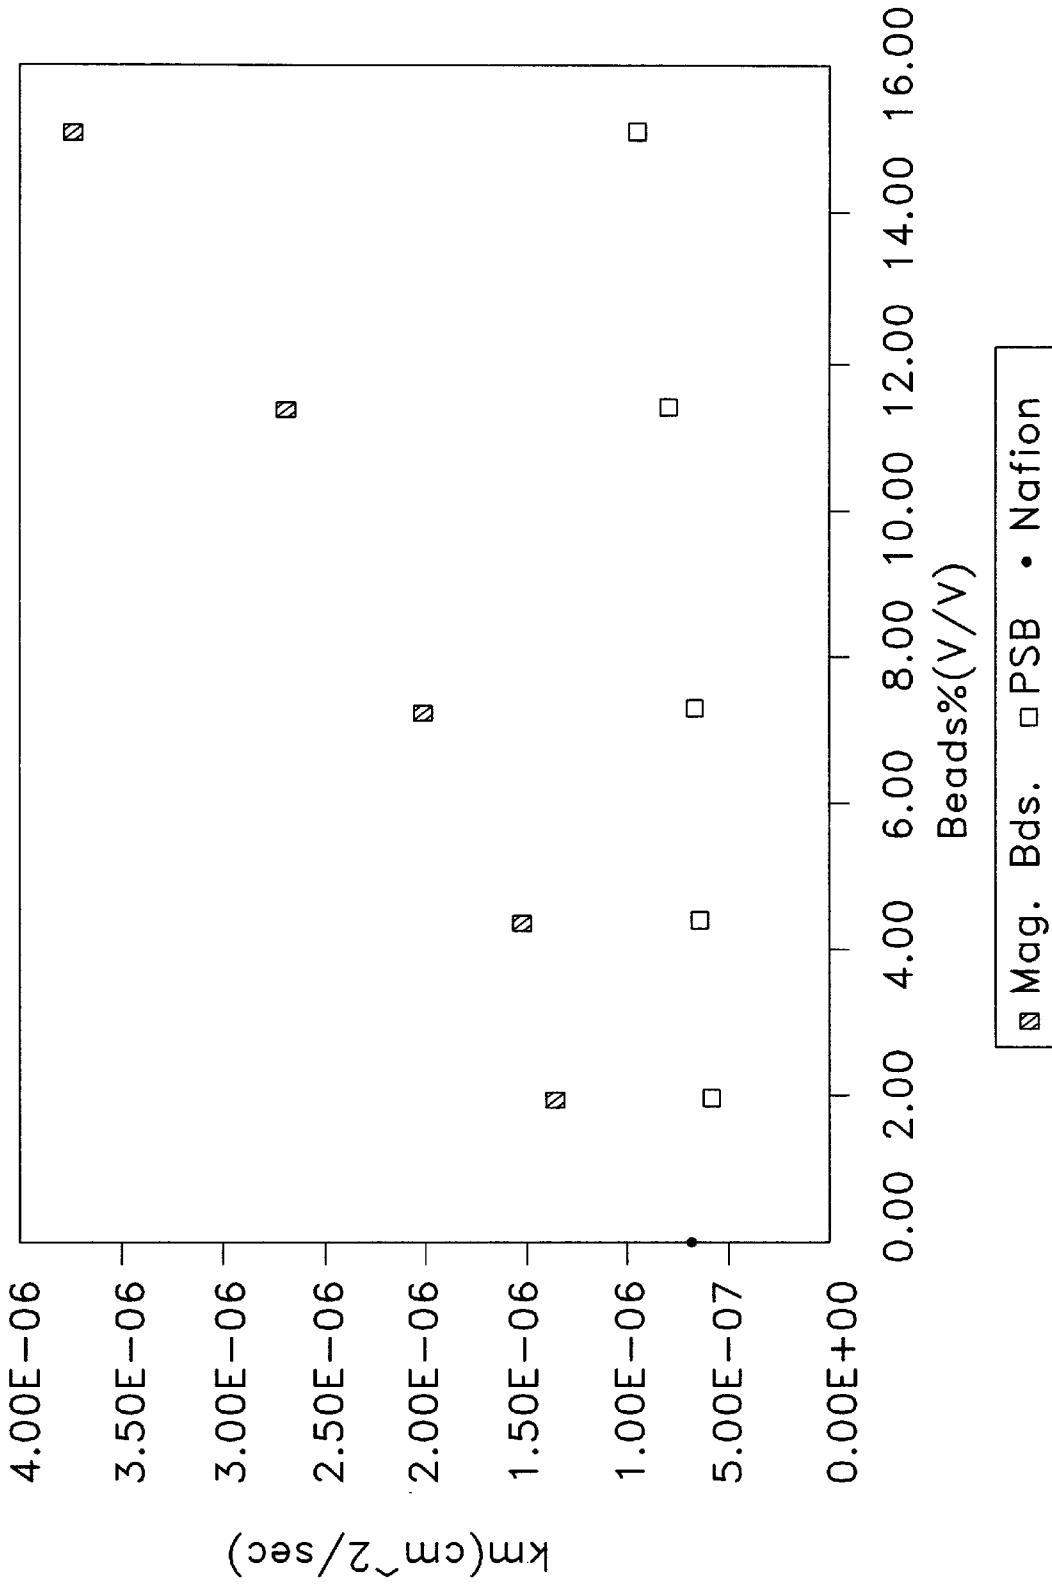


FIG. 10

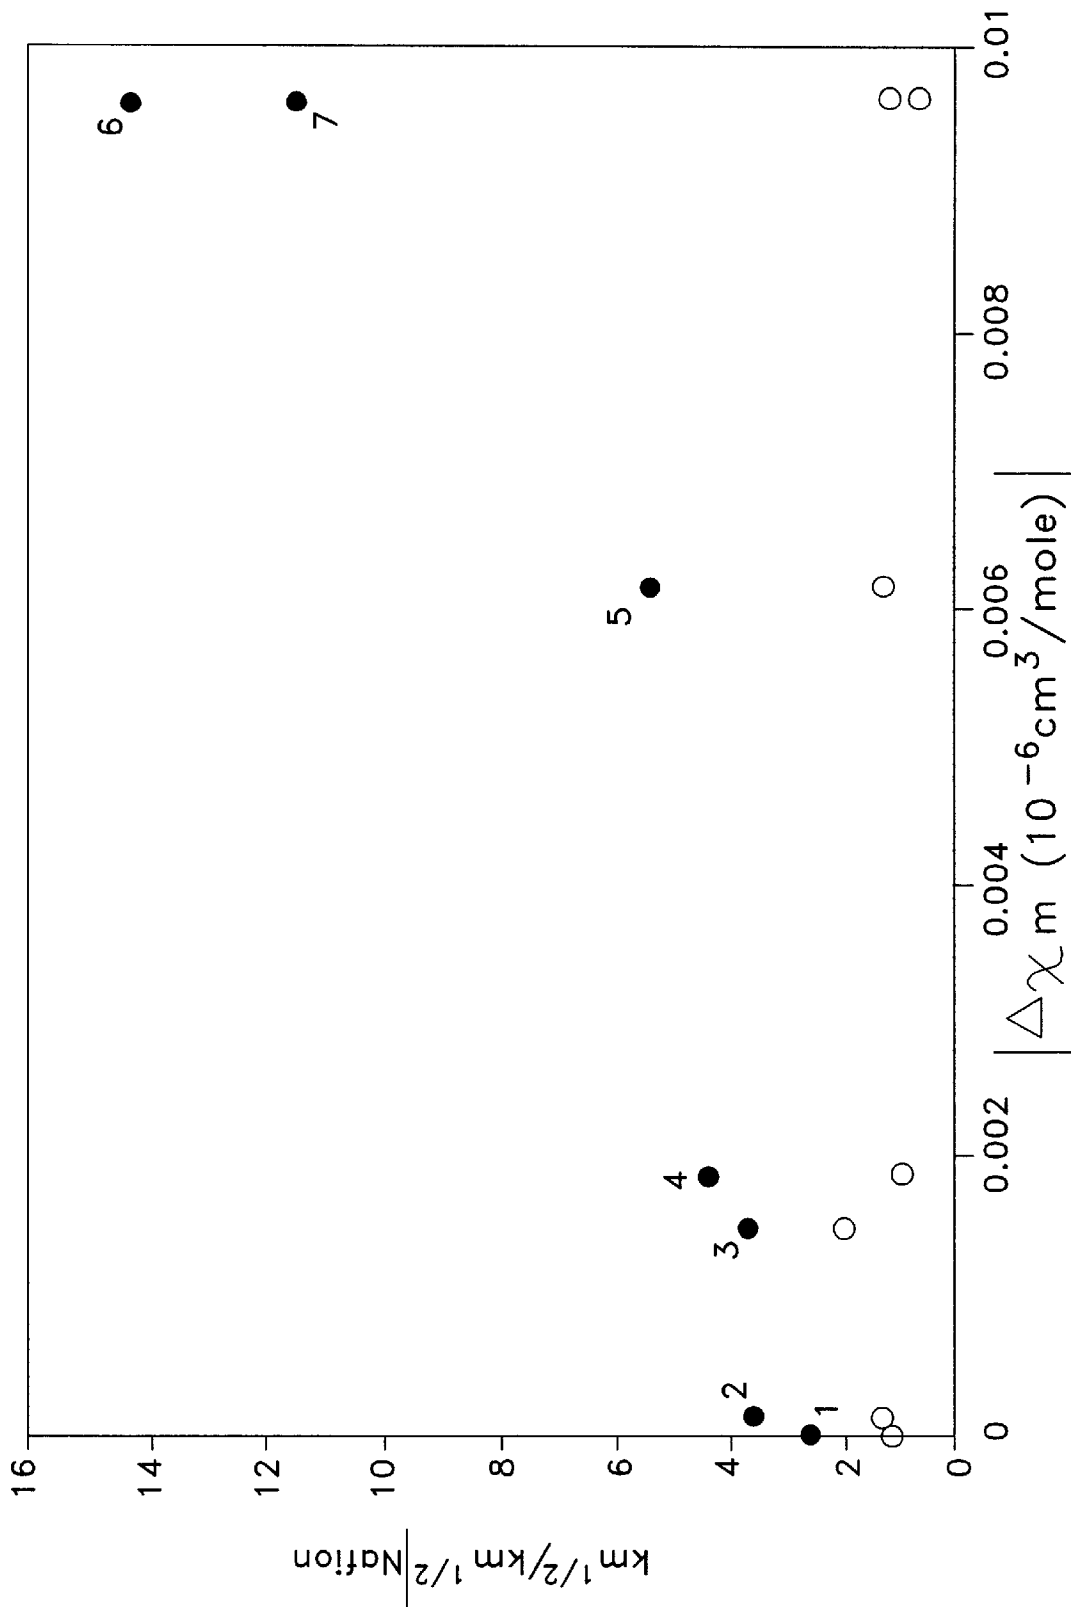


FIG. 11

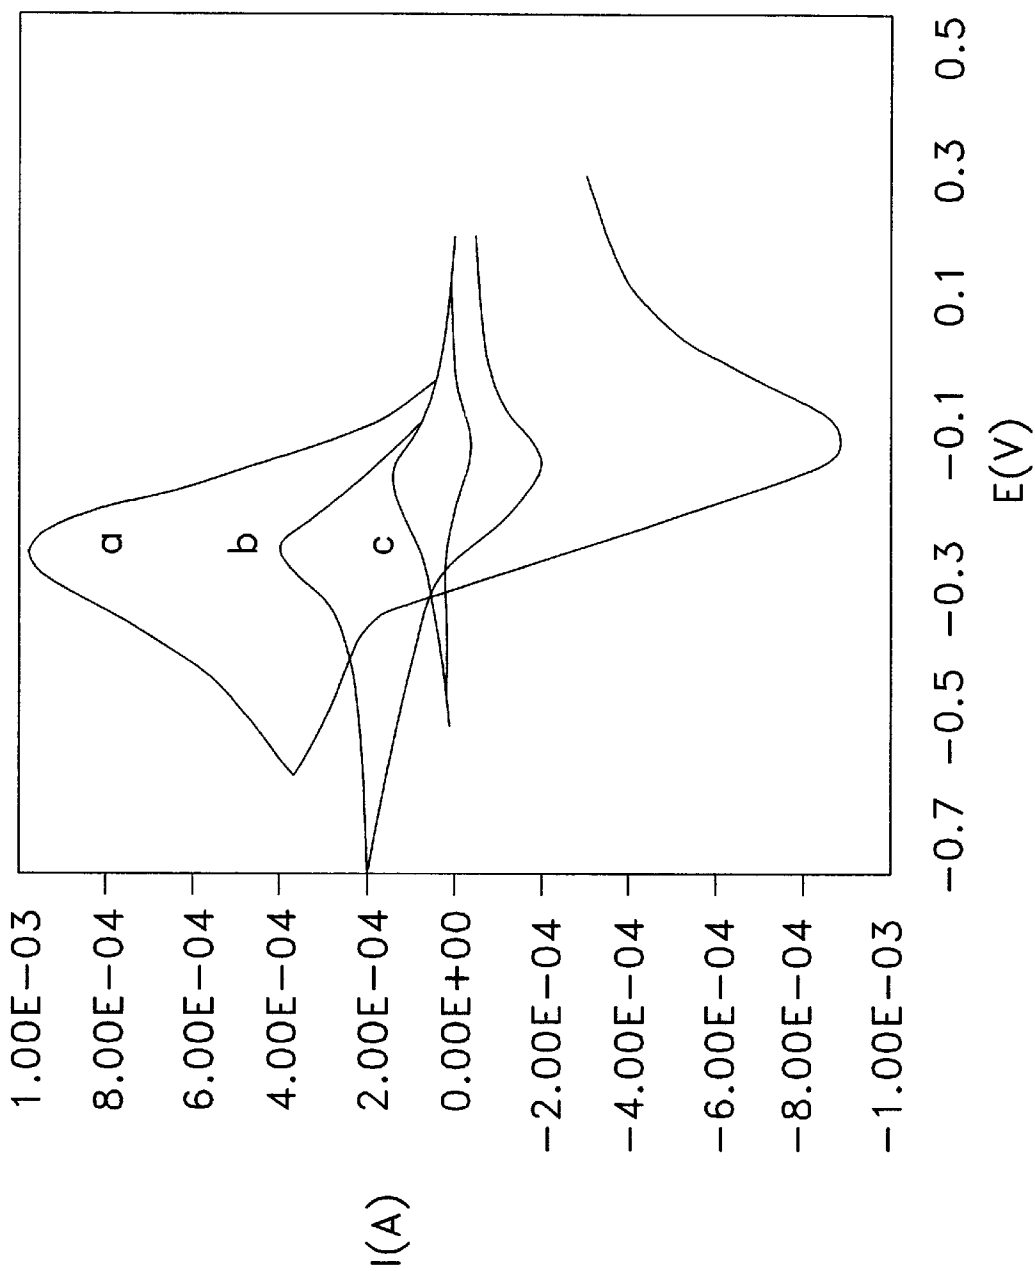


FIG. 12A

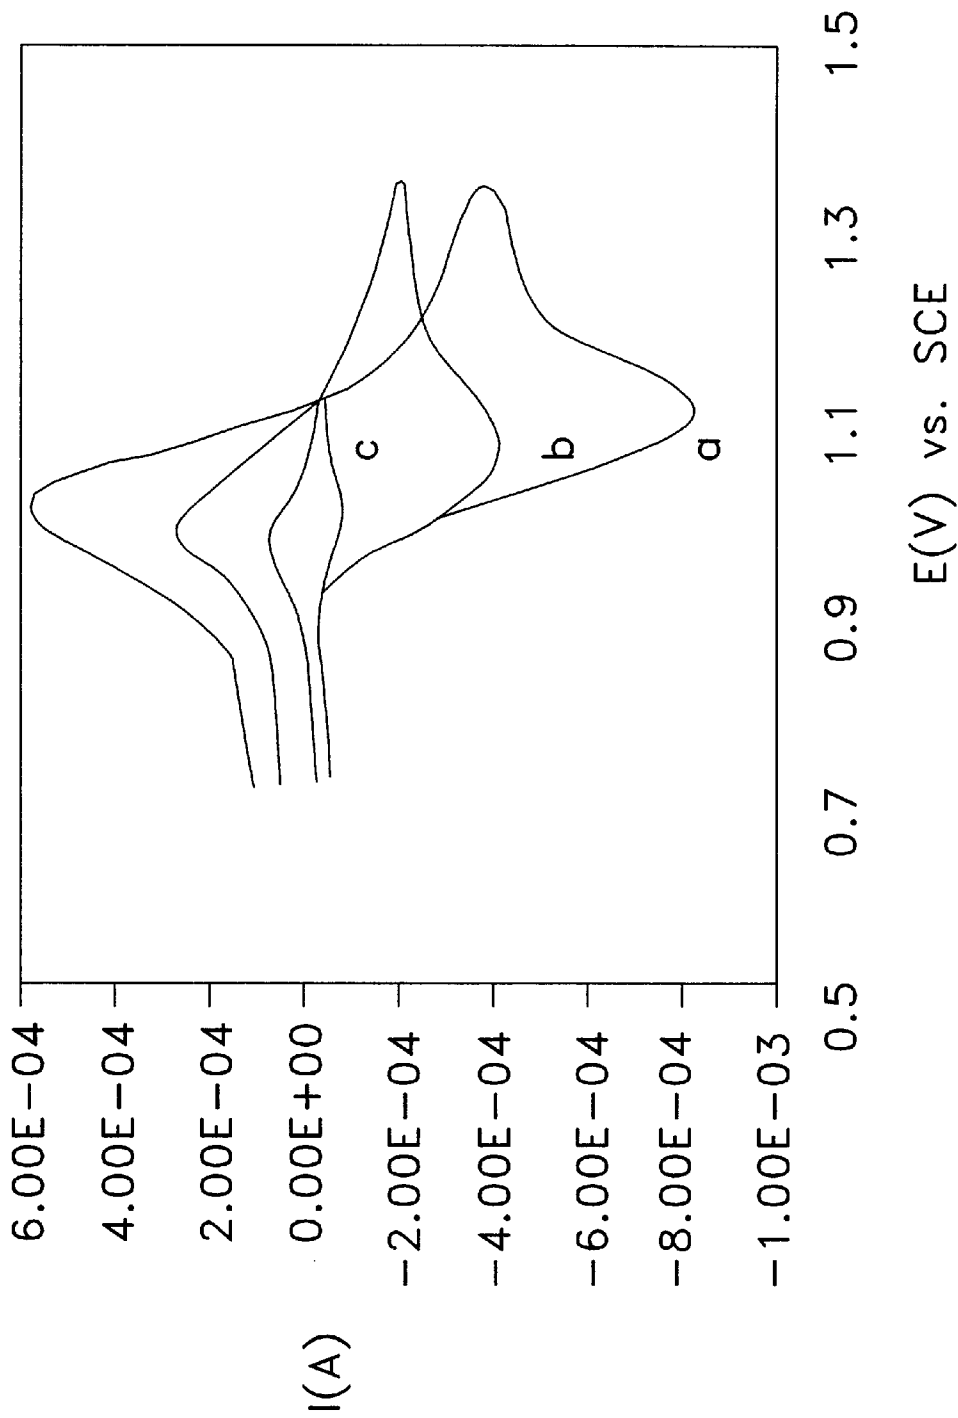


FIG. 12B

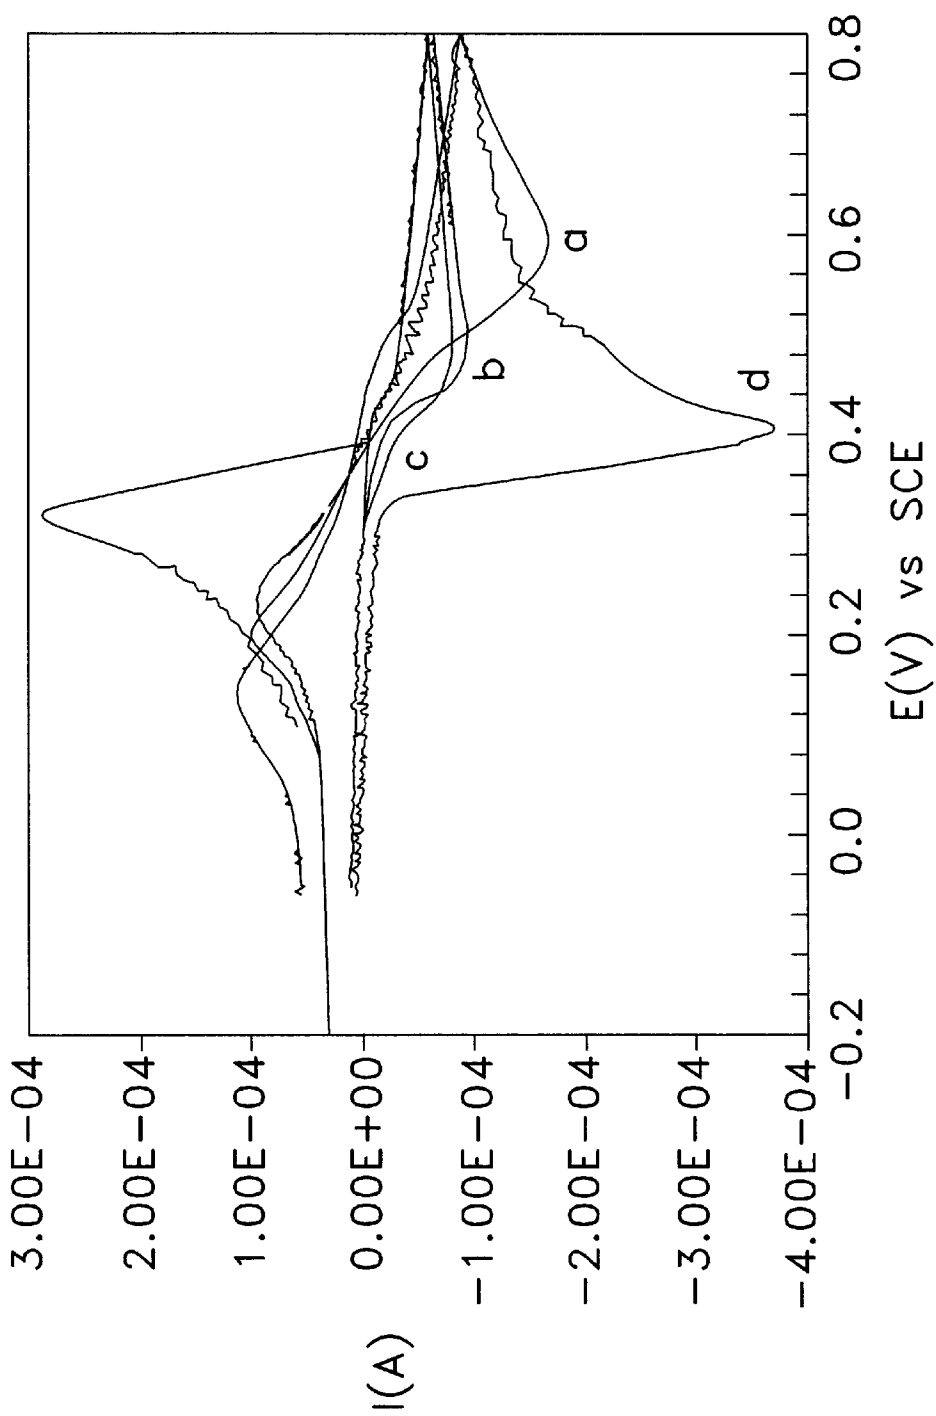


FIG. 12C

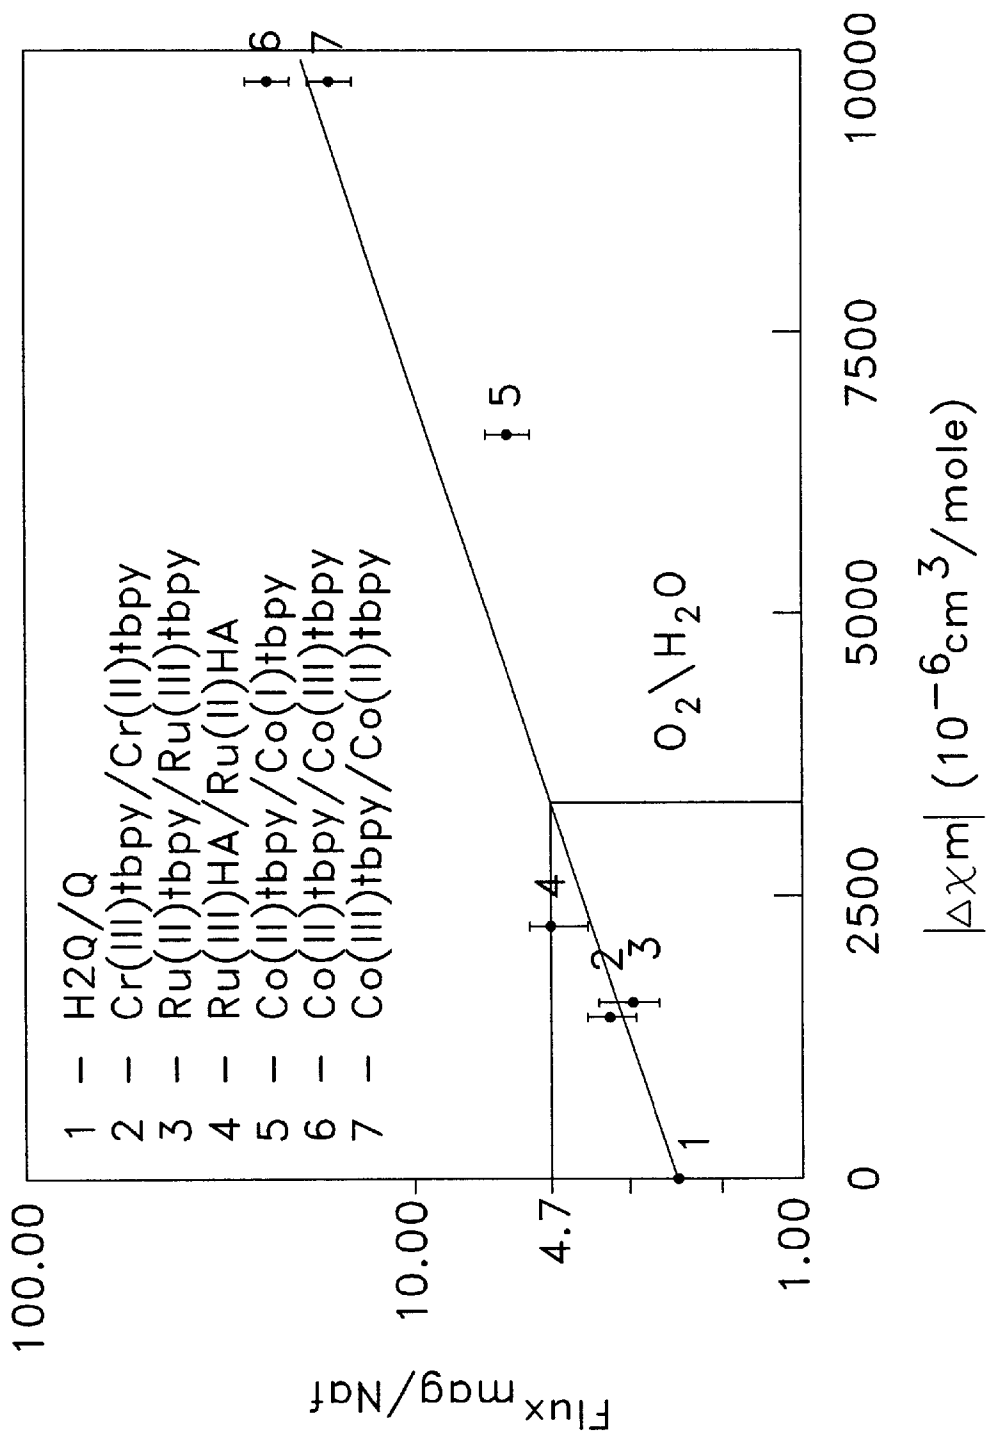


FIG. 13

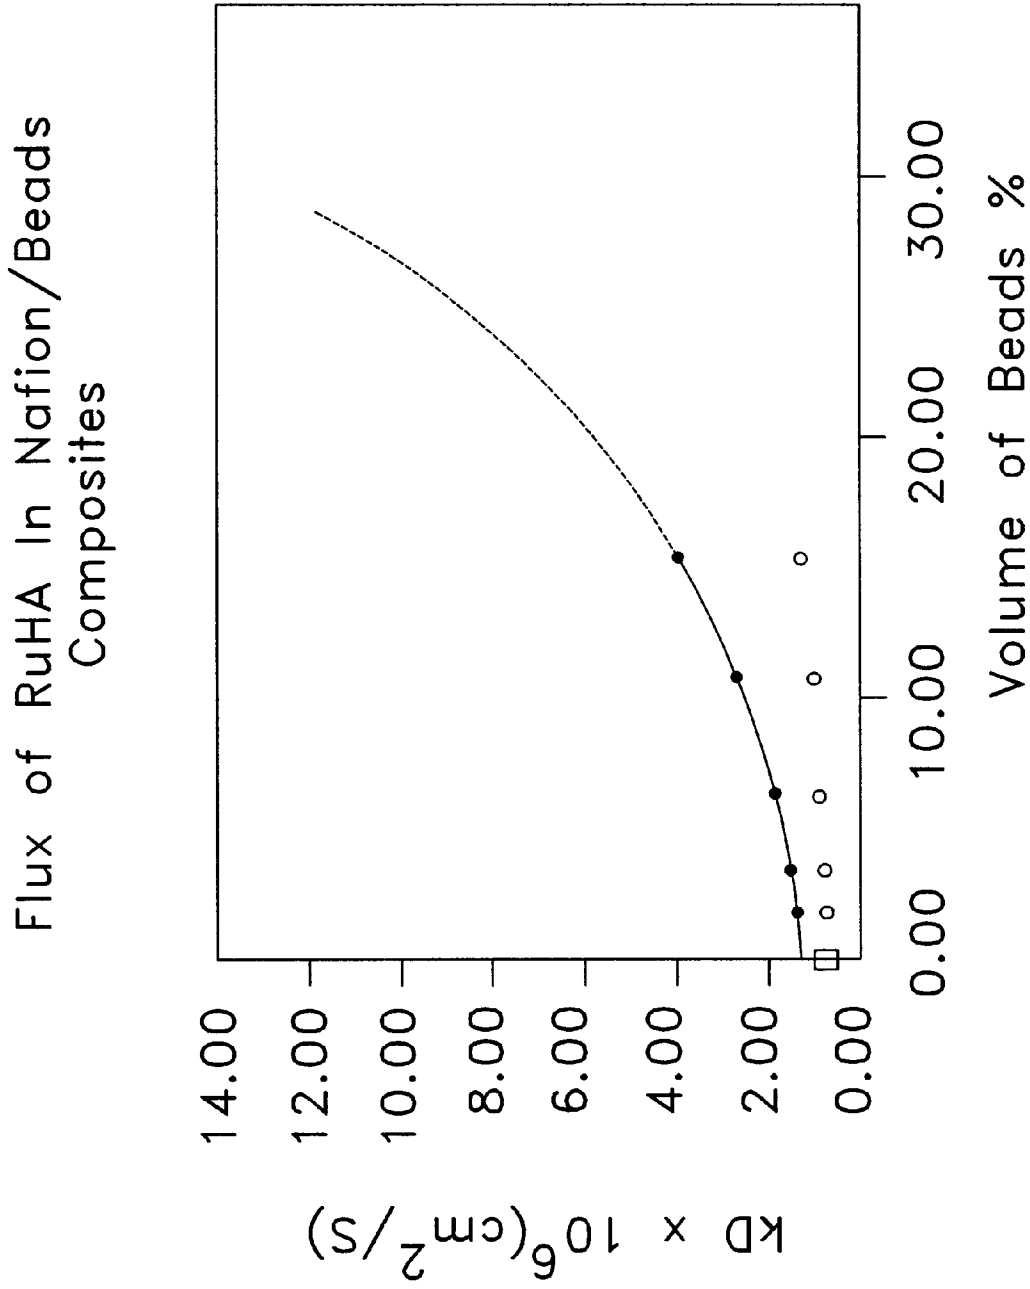


FIG. 14

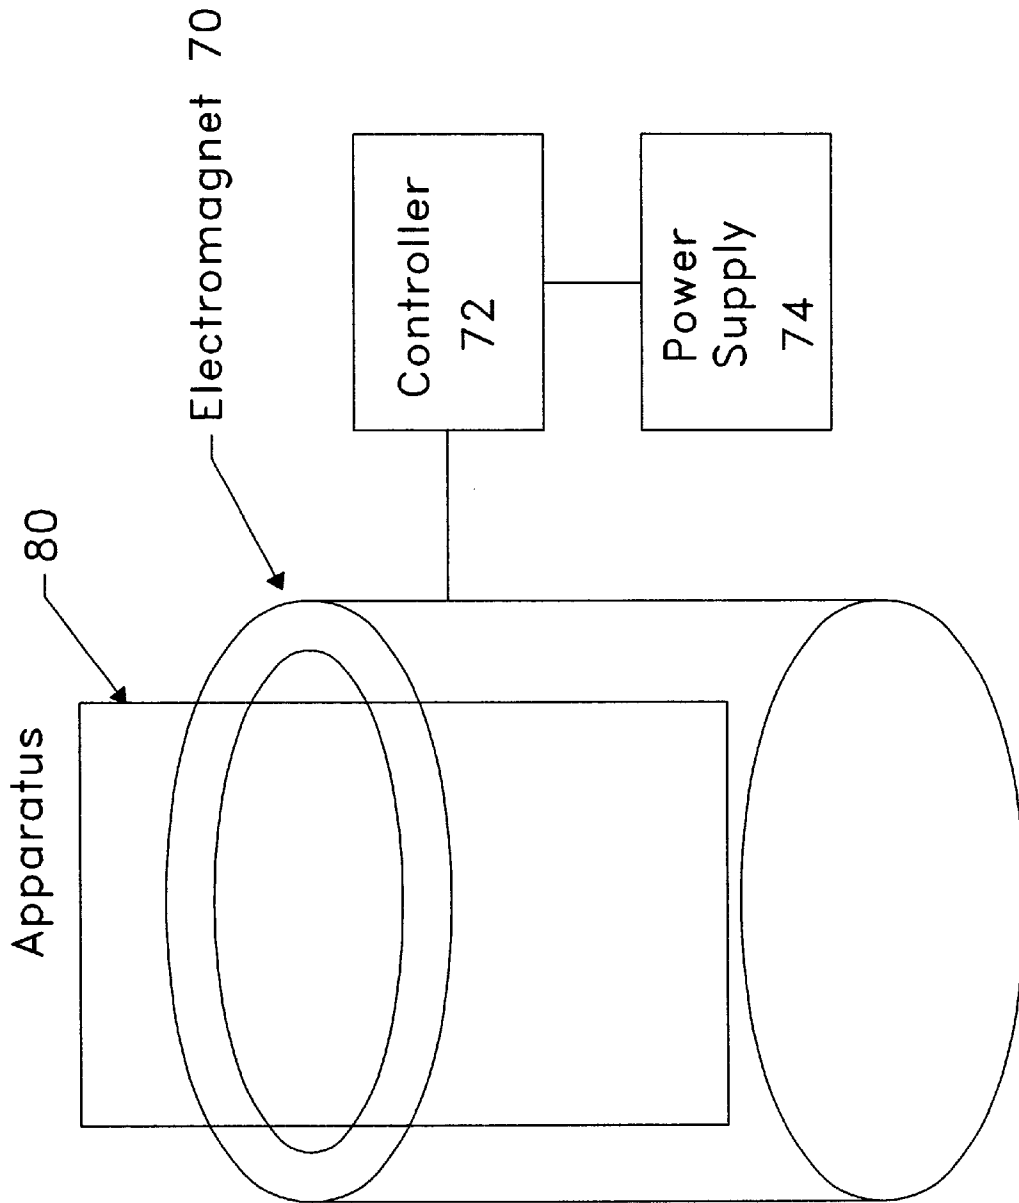


FIG. 15B

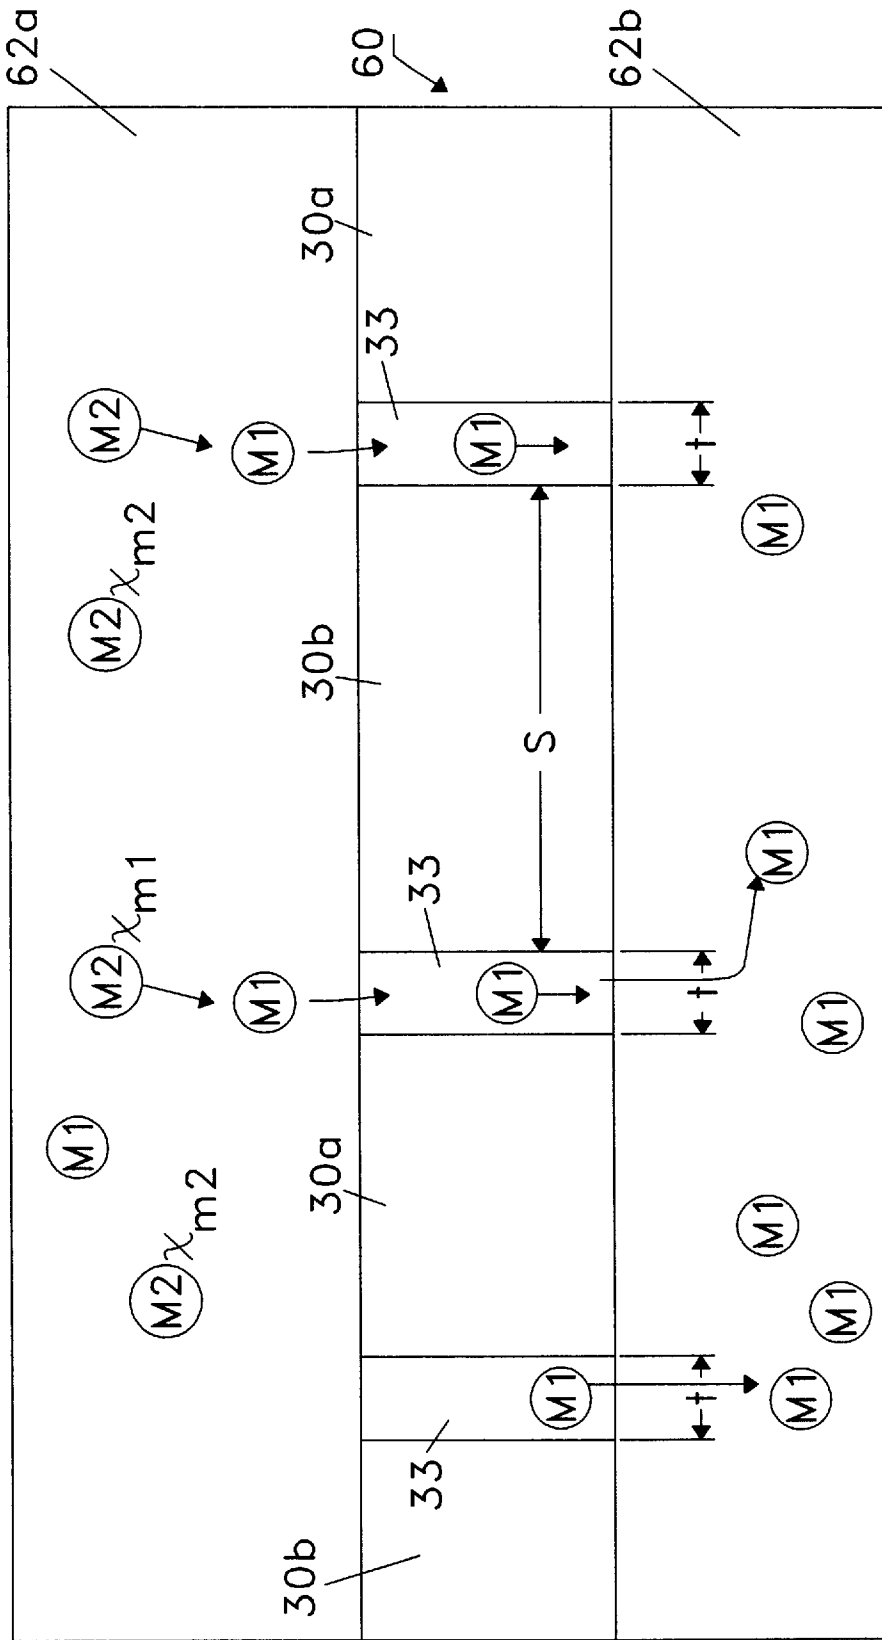


FIG. 16

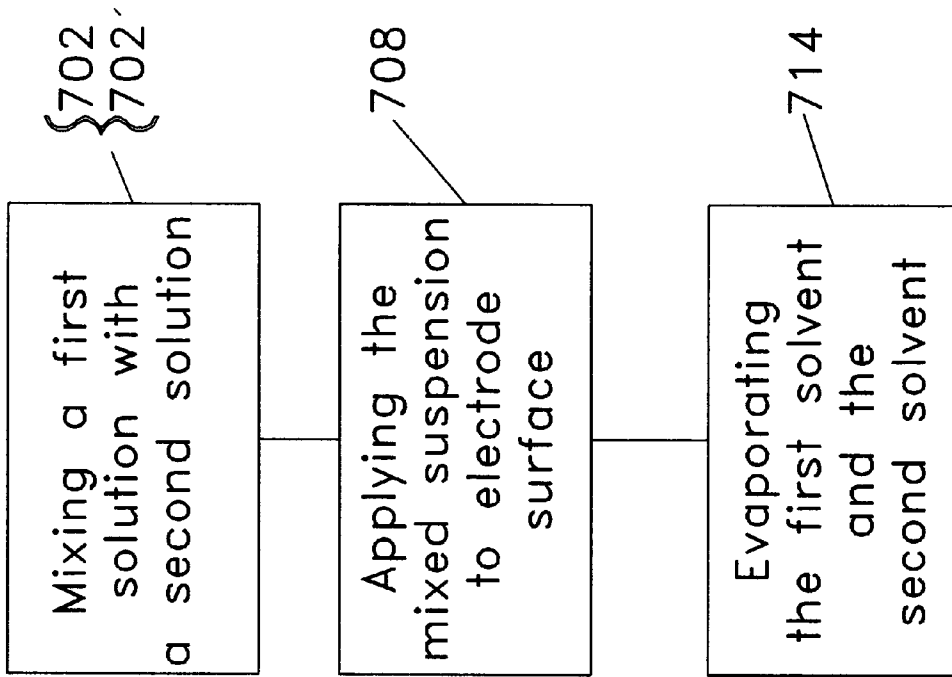


FIG. 17

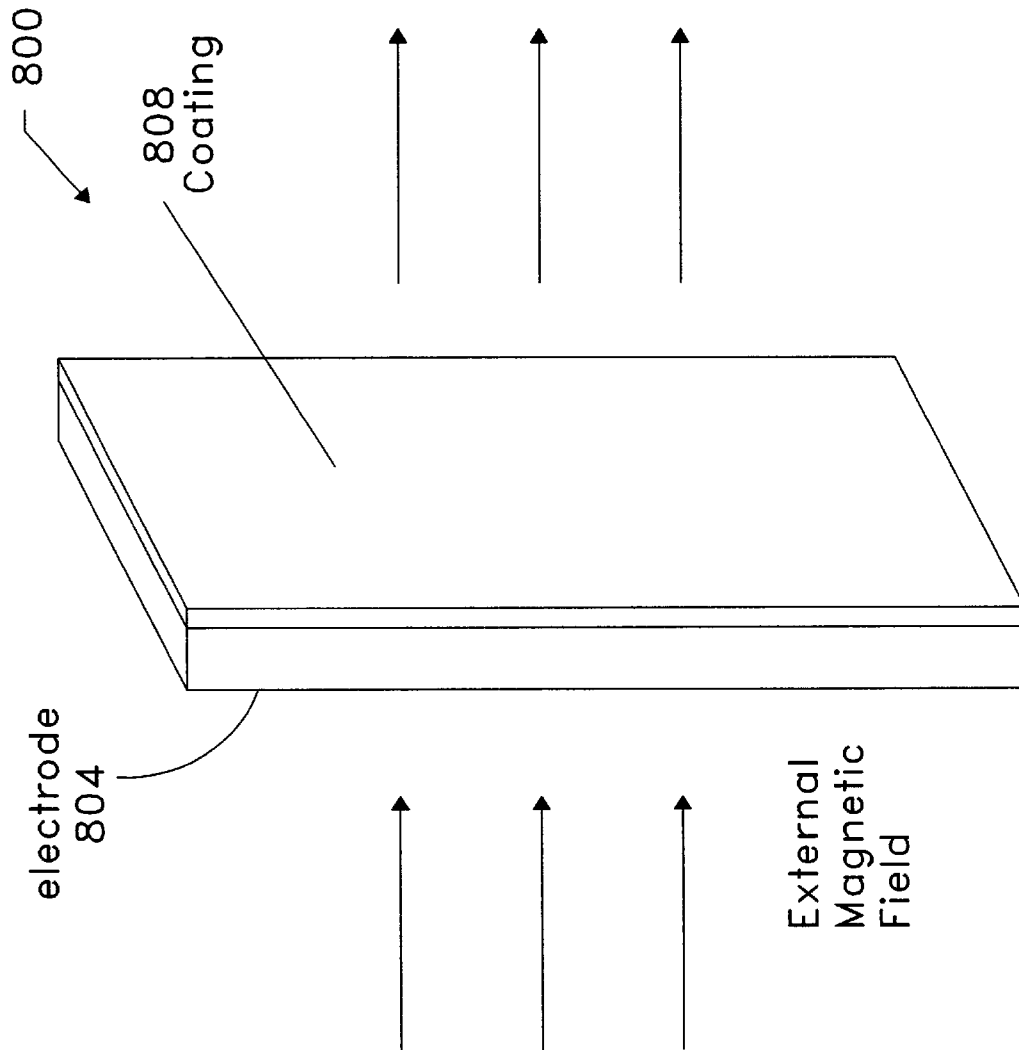


FIG. 18A

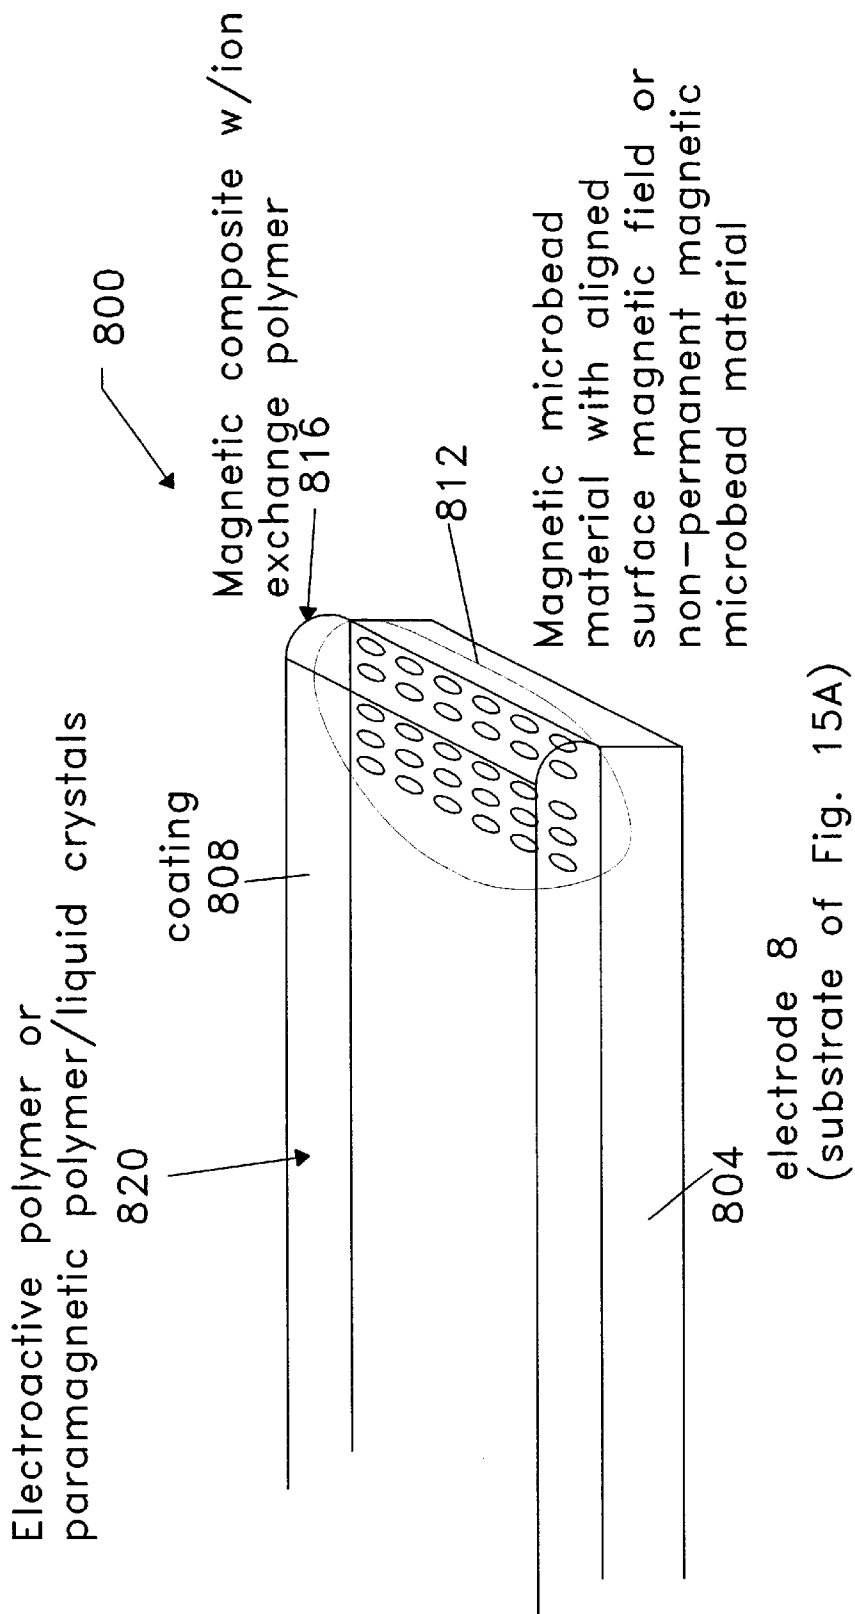


FIG. 18B

900

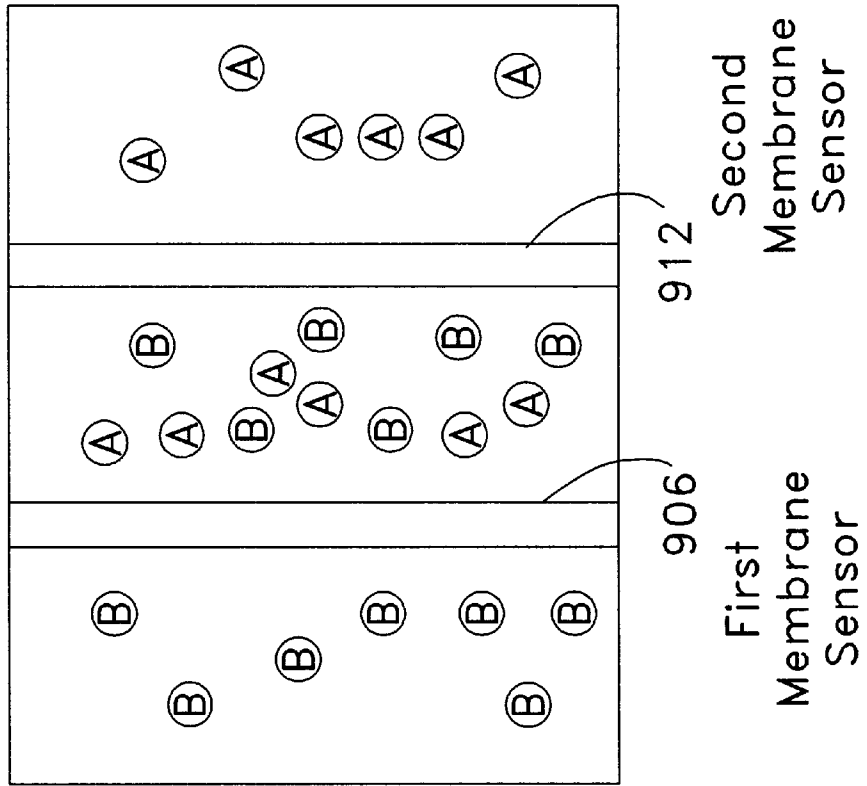


FIG. 19

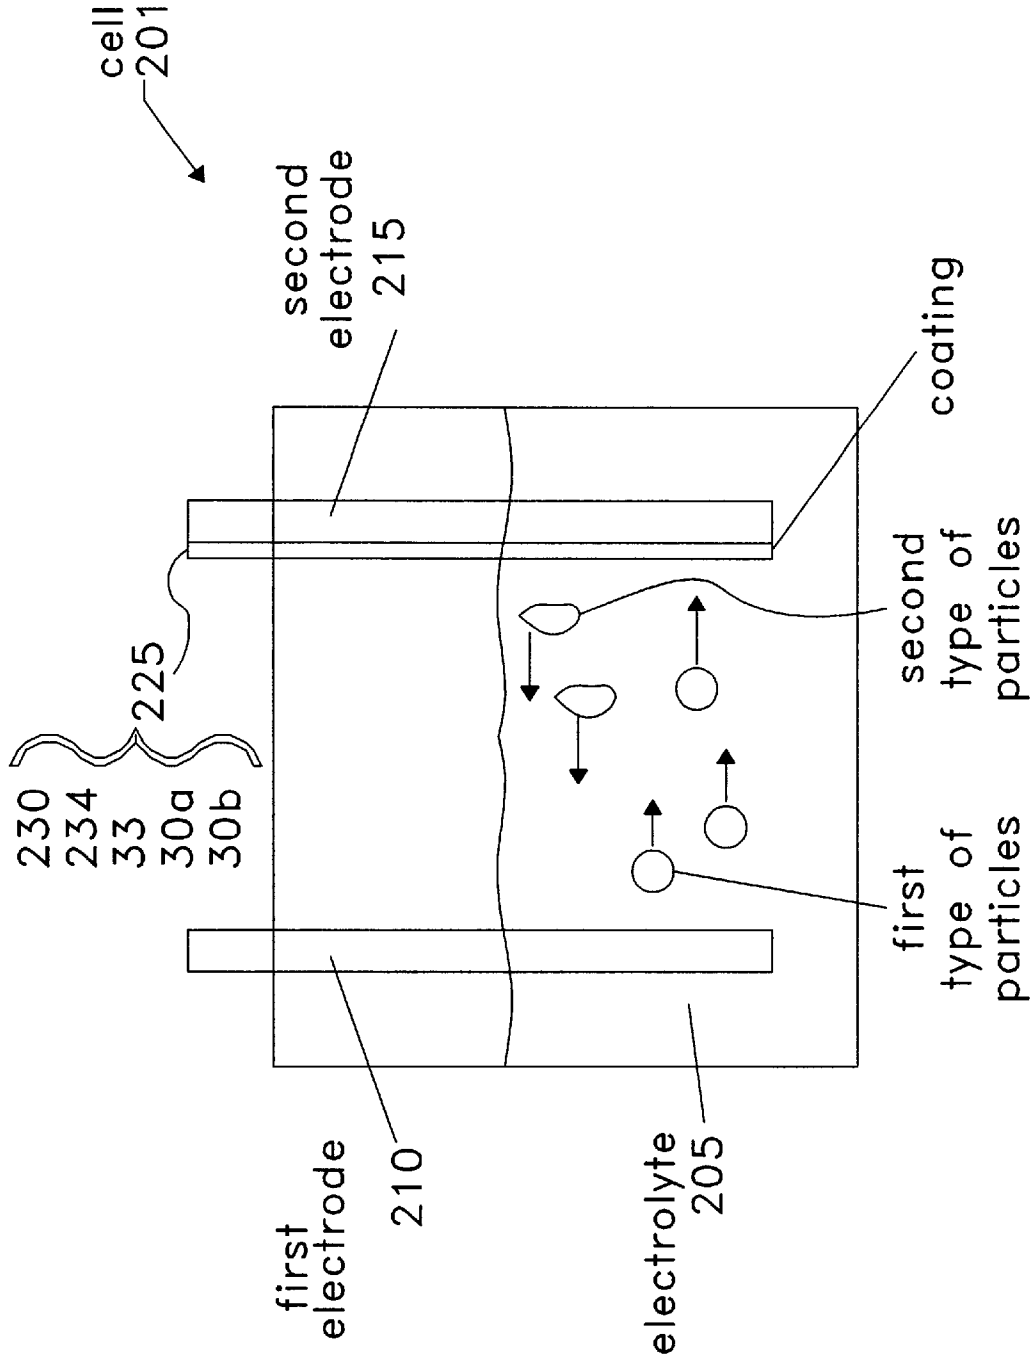


FIG. 20

METHODS FOR COATING SURFACES WITH MAGNETIC COMPOSITES EXHIBITING DISTINCT FLUX PROPERTIES

This application is a division of U.S. application Ser. No. 08/626,082, filed Apr. 1, 1996, now U.S. Pat. No. 5,786,040, which is a division of U.S. application Ser. No. 08/294,797, filed Aug. 25, 1994, now abandoned.

Part of the work performed during the development of this invention utilized U.S. government funds under grants No. CHE92-96013 and No. CHE93-20611 from the National Science Foundation, Chemistry Division, Analytical and Surface Science. The government may have certain rights in this invention.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to a method for forming and exploiting gradients at the interfaces between components of a composite material as well as to a method of coating a surface with a magnetic composite material, and devices which incorporate the material. In particular, the invention relates to a method for forming and exploiting magnetic gradients at the interfaces between components of a composite magnetic material and the magnetic composite material itself as well as devices which incorporate the composite material including electrochemical systems resulting in enhanced and modified flux and performance in those systems.

2. Background of the Related Art

Bulk properties of molecules in magnetic fields are fairly well understood. In the detailed description of preferred embodiments, it will be shown that interfacial gradients in properly prepared composite materials can be exploited to enhance flux in many types of electrochemical systems such as fuel cells, batteries, membrane sensors, filters and flux switches. First, however, the following discussion provides a brief overview of the current understanding of magnetic properties in composites. In particular, the discussion below summarizes the thermodynamic, kinetic and mass transport properties of bulk magnetic materials.

Rudimentary Magnetic Concepts

Paramagnetic molecules have unpaired electrons and are attracted into a magnetic field; diamagnetic species, with all electrons paired, are slightly repelled by the field. Radicals and oxygen are paramagnetic; most organic molecules are diamagnetic; and most metal ions and transition metal complexes are either para- or diamagnetic. How strongly a molecule or species in a solution or fluid responds to a magnetic field is parameterized by the molar magnetic susceptibility, X_m (cm^3/mole). For diamagnetic species, X_m is between $(-1 \text{ to } -500) \times 10^{-6} \text{ cm}^3/\text{mole}$, and temperature independent. For paramagnetic species, X_m ranges from 0 to $+0.01 \text{ cm}^3/\text{mole}$, and, once corrected for its usually small diamagnetic component, varies inversely with temperature (Curie's Law). While ions are monopoles and will either move with or against an electric field, depending on the sign of the ion, paramagnetic species are dipoles and will always be drawn into (aligned in) a magnetic field, independent of the direction of the magnetic vector. The dipole will experience a net magnetic force if a field gradient exists. Because electrochemistry tends to involve single electron transfer events, the majority of electrochemical reactions should result in a net change in the magnetic susceptibility of species near the electrode.

Magnetic field effects on chemical systems can be broken down into three types: thermodynamic, kinetic and mass transport. Macroscopic, thermodynamic effects are negligible, although local magnetic field effects may not be. Kinetically, both reaction rates and product distributions can be altered. Transport effects can lead to flux enhancements of several-fold. Quantum mechanical effects are also possible, especially on very short length scales, below 10 nm. The following summarizes what has been done with homogeneous fields applied to solutions and cells with external laboratory magnets.

Thermodynamics

A magnetic field applied homogeneously by placing a solution between the poles of a laboratory magnet will have a negligible nonexponential effect on the free energy of reaction. $\Delta G_m = -0.5 \Delta \chi_m B^2 \text{ J/mole}$, where ΔG_m is the change of the free energy of reaction due to the magnetic field, $\Delta \chi_m$ is the difference in magnetic susceptibility of the products and reactants, and B is the magnetic induction in gauss. For the conversion of a diamagnetic species into a paramagnetic species, $\Delta \chi_m \leq 0.01 \text{ cm}^3/\text{mole}$. In a 1 T (1 Tesla = 10 kGauss) applied field, $|\Delta G_m| \leq 0.05 \text{ J/mole}$. Even in the strongest laboratory fields of 10T, the effect is negligible compared to typical free energies of reaction ($\sim \text{kJ/mole}$). These are macroscopic arguments for systems where the magnet is placed external to the cell and a uniform field is applied to the solution. Microscopically, it may be possible to argue that local fields in composites are substantial, and molecules in composites within a short distance of the source of the magnetic field experience strong local fields. For example, for a magnetic wire or cylinder, the magnetic field falls off over a distance, x, as x^{-3} . The field experienced by a molecule 1 nm from the magnet is roughly 10^{21} times larger than the field experienced at 1 cm. This argument is crude, but qualitatively illustrates the potential advantage of a microstructural magnetic composite. (As an example, in composites comprising magnetic material and "Nafion" (DuPont), a larger fraction of the redox species are probably transported through the 1.5 nm zone at the interface between the Nafion and the magnetic particles.) These redox species must therefore experience large magnetic fields in close proximity to the interface.

Kinetics

Reaction rates, k, are parameterized by a pre-exponential factor, A, and a free energy of activation, ΔG^\ddagger ; $k = A \exp[-\Delta G^\ddagger/RT]$. An externally applied, homogeneous magnetic field will have little effect on ΔG^\ddagger , but can alter A. Non-adiabatic systems are susceptible to field effects. Magnetic fields alter the rate of free radical singlet-triplet interconversions by lifting the degeneracy of triplet states (affecting ΔG^\ddagger); rates can be altered by a factor of three in simple solvents. Because magnetic coupling occurs through both electronic nuclear hyperfine interactions and spin-orbit interactions, rates can be nonmonotonic functions of the applied field strength. Photochemical and electrochemical luminescent rates can be altered by applied fields. For singlet-triplet interconversions, magnetic fields alter product distributions when they cause the rate of interconversion to be comparable to the rate free radicals escape solvent cages. These effects are largest in highly viscous media, such as polymer films and micellar environments. Larger effects should be observed as the dimensionality of the system decreases. For coordination complexes, photochemical and homogeneous electron transfer rates are altered by magnetic

fields. Spin-orbit coupling is higher in transition metal complexes than organic radicals because of higher nuclear charge and partially unquenched orbital angular momentum of the d-shell electrons. The rate of homogeneous electron transfer between $\text{Co}(\text{NH}_3)_6^{3+}$ and $\text{Ru}(\text{NH}_3)_6^{2+}$ is below that expected for diffusion controlled reactions; in a 7 T magnetic field, the rate is suppressed two to three-fold. It has been argued that $\Delta\chi_m$ (and ΔG_m) is set by the magnetic susceptibility of the products, reactants, and activated complex, and a highly paramagnetic activated complex accounts for the field effect. For reversible electron transfer at electrodes in magnetic fields, no significant effect is expected. For quasireversible electron transfer with paramagnetic and diamagnetic species, electron transfer rates and transfer coefficients (α) are unchanged by magnetic fields applied parallel to electrodes. Magnetic fields applied perpendicular to electrodes in flow cells generate potential differences, which just superimpose on the applied electrode potentials. Potentials of 0.25V have been reported. Reversing the applied magnetic field reverses the sign of the potential difference. This effect does not change standard rate constants, only the applied potential.

Mass Transport

Magnetically driven mass transport effects have been studied in electrochemical cells placed between the poles of large magnets. Effects vary depending on the orientation of the electrode, the relative orientation of the magnetic field and the electrode, forced or natural convection, and the relative concentrations of the redox species and electrolyte. Three cases are illustrated in FIGS. 1, 2 and 3.

For a charged species moving by natural or forced convection parallel to an electrode and perpendicular to a magnetic field which is also parallel to the electrode, a Lorentz force is generated which moves the charged particle toward the electrode (FIG. 1). This magnetohydrodynamic effect is characterized by

$$F=q(E+v\times B), \quad (1)$$

where F , E , v , and B are vectors representing the Lorentz force on the charged species, the electric field, the velocity of the moving species, and the magnetic field, respectively; and q is the charge on the species. For flow cells and vertical electrodes, flux enhancements of a few-fold and reductions in the overpotential of a few tenths volts have been found in the presence of the magnetic field. Also, embedded in Equation 1 is the Hall effect; when a charged species moves through a perpendicular magnetic field, a potential is generated. This potential superimposes on the applied potential and causes migration in low electrolyte concentrations.

When the electrode and magnetic field are parallel to the earth, thermal motion leads to vortical motion at the electrode surface unless the field (B) and the current density (j) are spatially invariant and mutually perpendicular (see FIG. 2). This is parameterized as:

$$F_v=c^{-1}[j\times B]. \quad (2)$$

In Equation (2) F_v is the vector of magnetic force per volume and c is the speed of light. In general, these forces are smaller than Lorentz forces; flux enhancements of a few-fold and potential shifts of 10 to 20 mV are observed. Flux enhancements of paramagnetic and diamagnetic species are similar, but paramagnetic electrolytes enhance the flux of diamagnetic Zn^{2+} two-fold. Vortices suppress thermal motion and eddy diffusion.


The final configuration, shown in FIG. 3, is for the magnetic field perpendicular to the electrode surface, and, therefore, parallel to the electric field. Various, and sometimes inconsistent, results are reported for several configurations: for vertical electrodes in quiescent solution, flux enhancements of $\leq 1000\%$; for electrodes parallel to the earth with forced convection, flux retardations of 10%; and for electrodes parallel to the earth and no forced convection, both enhancements and no enhancements are reported.

The above summarizes the thermodynamic, kinetic, and mass transport effects for systems where the magnetic field is applied uniformly across a cell with an external magnet. None of these macroscopic effects predict or address properties dependent on the magnetic susceptibility of the redox species. Quantum mechanical effects may also be important, especially on short length scales.


Fuel Cells

Since the incomplete reduction of oxygen limits the efficiency of H_2/O_2 solid polymer electrolyte fuel cells, the cathode must be pressurized about five-fold over the anode.


Proton exchange membrane (PEM) fuel cell design is one which employs hydrogen as an anode feed and oxygen in air as a cathode feed. These fuels are decomposed electrically (to yield water) at electrodes typically modified with a noble metal catalyst. The hydrogen and oxygen are separated from each other by a proton exchange membrane (such as Nafion) to prevent thermal decomposition of the fuels at the noble metal catalysts.



However, fuel cell is typically run under non-equilibrium condition, and, as such, is subject to kinetic limitations. These limitations are usually associated with the reaction at the cathode.



As the reaction at the cathode becomes increasingly kinetically limited, the cell voltage drops, and a second reaction path, the two electron/two proton reduction of oxygen to peroxide, becomes increasingly favored. This consumes oxygen in two electron steps with lower thermodynamic potential.



The standard free energy of this reaction is 30% of the free energy available from the four electron reduction of oxygen to water. The decrease in current associated with the decreased number of electrons transferred and the decreased cell potential couple to yield substantially lower fuel cell power output.

One approach to enhance the efficiency of the cathodic reaction is to increase the concentration (pressure) of the feeds to the cathode—protons and oxygen—so as to enhance the flux (i.e., the reaction rate at the cathode in moles/cm²s) at the cathode. The proton flux is readily maintained at a sufficiently high value by the proton exchange membrane (usually Nafion) so as to meet the demand set by the cathode reaction. Normally, the method of enhancing the flux and biasing the reaction to favor the formation of water is to pressurize the air feed to the cathode. Pressures of 5–10 atmospheres are typical.

The need to pressurize air to the cathode in PEM fuel cells has been a major obstacle in the development of a cost effective fuel cell as a replacement for the internal combustion engine e.g. in a vehicle. In particular, pressurization of the cathode requires compressors. In transportation applications, power from the fuel cell is needed to run the compressor. This results in approximately 15% reduction in the power output of the total fuel cell system.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to provide a process for coating a surface of a device with a magnetic composite material responsive to an external magnetic field.

Another object of the invention is to provide a process for coating a surface of a device with a magnetic composite material having a plurality of boundary regions with magnetic gradients having paths to the coated surface when an external magnetic field is applied to the coated surface.

Another object of the invention is to provide a coating on an electrode to enhance the flux of magnetic species to the electrode.

Another object of the invention is to provide a separator to separate magnetic species from each other dependent upon magnetic susceptibility.

Another object of the invention is to provide a method for making a coating for an electrode to improve the flux of magnetic species to the electrode.

Another object of the invention is to provide an improved fuel cell.

Another object of the invention is to provide an improved cathode in a fuel cell.

Another object of the invention is to provide an improved battery.

Another object of the invention is to provide an improved membrane sensor.

Another object of the invention is to provide an improved flux switch.

Another object of the invention is to provide an improved fuel cell cathode with passive oxygen pressurization.

Another object of the invention is to provide an improved separator for separating paramagnetic species from diamagnetic species.

Another object of the invention is to provide an improved electrolytic cell.

Another object of the invention is to provide an improved electrolytic cell for an electrolyzable gas.

Another object of the invention is to provide an improved graded density composite for controlling chemical species transport.

Another object of the invention is to provide an improved dual sensor.

One advantage of the invention is that it can enhance the flux of paramagnetic species to an electrode.

Another advantage of the invention is that it can enhance the flux of oxygen to the cathode in a fuel cell, equivalent to passive pressurization.

Another advantage of the invention is that it can separate paramagnetic, diamagnetic, and nonmagnetic chemical species from a mixture.

Another advantage of the invention is that it can separate chemical species according to chemical, viscosity, and magnetic properties.

Another advantage of the invention is that it can take advantage of magnetic field gradients in magnetic composites.

Another advantage of the invention is that it can be designed to work with internal or external magnetic fields, or both.

One feature of the invention is that it includes a magnetically modified electrode.

Another feature of the invention is that it includes a process for coating a surface of a device with a magnetic composite material responsive to an external magnetic field, wherein the coating imparts increased electrochemical efficiency, and/or increased flux, at said surface.

Another feature of the invention is that it includes magnetic composites made from ion exchange polymers and non-permanent magnet microbeads with magnetic properties which are susceptible to externally applied magnetic fields.

Another feature of the invention is that it includes magnetic composites made from ion exchange polymers and organo-Fe (superparamagnetic or ferrofluid) or other permanent magnetic and nonpermanent magnetic or ferromagnetic or ferrimagnetic material microbeads which exhibit magnetic field gradients.

These and other objects, advantages and features are accomplished by a separator arranged between a first region containing a first type of particle and a second type of particle and a second region, comprising: a first material having a first magnetism; a second material having a second magnetism; a plurality of boundaries providing a path between the first region and the second region, each of the plurality of boundaries having a magnetic gradient within the path, the path having an average width of approximately one nanometer to approximately several micrometers, wherein the first type of particles have a first magnetic susceptibility and the second type of particles have a second magnetic susceptibility, wherein the first and the second magnetic susceptibilities are sufficiently different that the first type of particles pass into the second region while most of the second type of particles remain in the first region.

These and other objects, advantages and features are also accomplished by the provision of a cell, comprising: an electrolyte including a first type of particles; a first electrode arranged in the electrolyte; and a second electrode arranged in the electrolyte wherein the first type of particles transform into a second type of particles once the first type of particles reach the second electrode, the second electrode having a surface with a coating which includes: a first material having a first magnetism; a second material having a second magnetism; a plurality of boundaries providing a path between the electrolyte and the surface of the second electrode, each of the plurality of boundaries having a magnetic gradient within the path, the path having an average width of approximately one nanometer to approximately several micrometers, wherein the first type of particles have a first magnetic susceptibility and the second type of particles have a second magnetic susceptibility, and the first and the second magnetic susceptibilities are different.

These and other objects, advantages and features are also accomplished by the provision of a method of coating a surface with a magnetic composite material, comprising the steps of: preparing a casting mixture comprising magnetic microbeads and an ion exchange polymer; casting the casting mixture on the surface; and drying the casting mixture to yield a magnetic composite coating on the surface.

These and other objects, advantages and features are also accomplished by the provision of a method of coating a surface of a device with a magnetic composite material, comprising the steps of: mixing a first suspension compris-

ing at least about 1% by weight of inert polymer coated magnetic microbeads in a first solvent with a second suspension comprising at least about 2% by weight of ion exchange polymers in a second solvent to yield a mixed suspension or casting mixture; applying the mixed suspension to the surface, the surface being arranged in a magnetic field of at least about 0.5 Tesla and being oriented approximately 90° with respect to the normal of the electrode surface; and evaporating the first solvent and the second solvent to yield a surface coating having a plurality of boundary regions with magnetic gradients having paths to the coated surface.

These and other objects, advantages and features are also accomplished by the provision of a method of making an electrode with a surface coated with a magnetic composite with a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode, comprising the steps of: mixing a first component which includes a suspension of at least approximately 1 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent magnetizable material having diameters at least 0.5 micrometers in a first solvent with a second component comprising at least approximately 2 percent by weight of an ion exchange polymer in a second solvent to yield a casting mixture or mixed suspension; applying the mixed suspension to the surface of the electrode, the electrode being arranged in a magnetic field of at least approximately 0.05 Tesla and being oriented approximately 90 degrees with respect to the normal of the electrode surface; and evaporating the first solvent and the second solvent to yield the electrode with a surface coated with the magnetic composite having a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode.

These and other objects, advantages and features are further accomplished by a method of making an electrode with a surface coated with a composite with a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode when an external magnetic field is turned on, comprising the steps of: mixing a first component which includes a suspension of at least 5 percent by weight of inert polymer coated microbeads containing between 10 percent and 90 percent magnetizable non-permanent magnetic material having diameters at least 0.5 micrometers in a first solvent with a second component comprising at least 5 percent by weight of an ion exchange polymer in a second solvent to yield a casting mixture or mixed suspension; applying the mixed suspension to the surface of the electrode; evaporating the first solvent and the second solvent to yield the electrode with a surface coated with the composite having a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode when an external magnet is turned on.

These and other objects, advantages and features are further accomplished by a method of forming a graded density layer, comprising the steps of: formulating a series of casting mixtures, each of the series of casting mixtures comprising a polymeric material and a solvent, wherein the series of casting mixtures have a range of concentrations of the polymeric material; applying to a surface a film of one of the series of casting mixtures and evaporating the solvent; and, further applying to the surface a film of another of the series of casting mixtures and evaporating the solvent, to yield a coating of the graded density layer on the surface.

These and other objects, advantages and features are also accomplished by an electrode for channeling flux of magnetic species comprising: a conductor; a composite of a first

material having a first magnetism and a second material having a second magnetism in surface contact with the conductor, wherein the composite comprises a plurality of boundaries providing pathways between the first material and the second material, wherein the pathways channel the flux of the magnetic species through the pathways to the conductor.

These and other objects, advantages and features are further accomplished by an electrode for effecting electrolysis of magnetic species comprising: a conductor; and magnetic means in surface contact with the conductor for enhancing the flux of the magnetic species in an electrolyte solution to the conductor and thereby effecting electrolysis of the magnetic species.

These and other objects, advantages and features are further accomplished by an electrode for effecting electrolysis of magnetic species comprising: a conductor; and means in surface contact with the conductor for enhancing the flux of the magnetic species to the conductor and thereby effecting electrolysis of the magnetic species.

These and other objects, advantages and features are yet further accomplished by an electrode for electrolysis of magnetic species comprising: a conductor; a composite magnetic material in surface contact with the conductor, the composite magnetic material having a plurality of transport pathways through the composite magnetic material to enhance the passage of the magnetic species to the conductor and thereby effecting electrolysis of the magnetic species.

These and other objects, advantages and features are also accomplished by a system, comprising: a first electrolyte species with a first magnetic susceptibility; a second electrolyte species with a second magnetic susceptibility; and a means for channeling the first electrolyte species with a first magnetic susceptibility preferentially over the second electrolyte species with a second magnetic susceptibility, wherein the means comprises a first material having a first magnetism forming a composite with a second material having a second magnetism.

These and other objects, advantages and features are also accomplished by a system for separating first particles and second particles with different magnetic susceptibilities comprising: a first magnetic material with a first magnetism; and a second magnetic material with a second magnetism working in conjunction with the first magnetic material to produce magnetic gradients, wherein the magnetic gradients separate the first particles from the second particles.

These and other objects, advantages and features are accomplished by a composite material for controlling chemical species transport comprising: an ion exchanger and; a graded density layer, wherein the ion exchanger is sorbed into the graded density layer. These and other objects, advantages and features are further accomplished by a magnetic composite material for controlling magnetic chemical species transport according to magnetic susceptibility comprising: an ion exchanger; a polymer coated magnetic microbead material; and a graded density layer, wherein the ion exchanger and the polymer coated magnetic microbead material are sorbed into the graded density layer.

These and other objects, advantages and features are further accomplished by a composite material for controlling chemical species viscous transport comprising: an ion exchanger; a graded viscosity layer, wherein the ion exchanger is sorbed into the graded viscosity layer.

These and other objects, advantages and features are further accomplished by a magnetic composite material for

controlling magnetic chemical species transport and distribution comprising: an ion exchanger; a polymer coated magnetic microbead material; and a graded density layer, wherein the ion exchanger and the polymer coated magnetic microbead material are sorbed into the graded density layer forming a gradient in the density of the polymer coated magnetic microbead material substantially perpendicular to a density gradient in the graded density layer.

These and other objects, advantages and features are further accomplished by a magnetic composite material for controlling magnetic chemical species transport and distribution comprising: an ion exchanger; a polymer coated magnetic microbead material; and a graded density layer, wherein the ion exchanger and the polymer coated magnetic microbead material are sorbed into the graded density layer forming a gradient in the density of the polymer coated magnetic microbead material substantially parallel to a density gradient in the graded density layer.

These and other objects, advantages and features are also accomplished by an ion exchange composite with graded transport and chemical properties controlling chemical species transport comprising: an ion exchanger; and a laminate graded density layer having a first side and a second side, wherein the ion exchanger is one of sorbed into the graded density layer and cocast on the graded density layer and the laminate graded density layer and the ion exchanger are contained within the first side and the second side, wherein the first side is in closer proximity to the source of the chemical species and the second side is more distal to the source of the chemical species, and wherein the laminate graded density layer has lower density toward the first side and higher density toward the second side, substantially increasing in density in a direction from the first side toward the second side.

These and other objects, advantages and features are also accomplished by an ion exchange composite with graded transport and chemical properties controlling chemical species transport comprising: an ion exchanger; and a laminate graded density layer having a first side and a second side, wherein the ion exchanger is one of sorbed into the graded density layer and cocast on the graded density layer, and the ion exchanger and the laminate graded density layer are contained within the first side and the second side, wherein the first side is in closer proximity to the source of the chemical species and the second side is more distal to the source of the chemical species, and wherein the laminate graded density layer has higher density toward the first side and lower density toward the second side, substantially decreasing in density in a direction from the first side toward the second side.

These and other objects, advantages and features are accomplished also by a dual sensor for distinguishing between a paramagnetic species and a diamagnetic species comprising: a magnetically modified membrane sensor; and an unmodified membrane sensor, wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the paramagnetic species over the diamagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the diamagnetic species and the paramagnetic species, enabling the measurement of the concentration of at least the paramagnetic species. These and other objects, advantages and features are further accomplished by a dual sensor for distinguishing between a paramagnetic species and a nonmagnetic species comprising: a magnetically modified membrane sensor; an unmodified membrane sensor, wherein the magnetically modified membrane sensor

preferentially enhances the concentration of and allows the detection of the paramagnetic species over the nonmagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the nonmagnetic species and the paramagnetic species, enabling the measurement of the concentration of at least the paramagnetic species.

These and other objects, advantages and features are further accomplished by a dual sensor for distinguishing between a first diamagnetic species and a second diamagnetic species comprising: a magnetically modified membrane sensor; and a differently magnetically modified membrane sensor; wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the first diamagnetic species over the second diamagnetic species and the differently magnetically modified membrane sensor enhances the concentration of and allows the detection of the second paramagnetic species and the diamagnetic species, enabling the measurement of the concentration of at least the first diamagnetic species.

These and other objects, advantages and features are further accomplished by a dual sensor for distinguishing between a first paramagnetic species and a second paramagnetic species comprising: a magnetically modified membrane sensor; and a differently magnetically modified membrane sensor, wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the first paramagnetic species over the second paramagnetic species and the differently magnetically modified membrane sensor enhances the concentration of and allows the detection of the second paramagnetic species and the first paramagnetic species, enabling the measurement of the concentration of at least the first paramagnetic species.

These and other objects, advantages and features are further accomplished by a dual sensor for distinguishing between a diamagnetic species and a nonmagnetic species comprising: a magnetically modified membrane sensor; and an unmodified membrane sensor, wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the diamagnetic species over the nonmagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the nonmagnetic species and the diamagnetic species, enabling the measurement of the concentration of at least the diamagnetic species.

These and other objects, advantages and features are further accomplished by a flux switch to regulate the flow of a redox species comprising: an electrode; a coating on the electrode, wherein the coating is formed from a composite comprising: a magnetic microbead material with aligned surface magnetic field; an ion exchange polymer; and an electro-active polymer in which a first redox form is paramagnetic and a second redox form is diamagnetic, wherein the flux switch is actuated by electrolyzing the electro-active polymer from the first redox form ordered in the magnetic field established by the coating to the second redox form disordered in the magnetic field.

These and other objects, advantages and features are also accomplished by a flux switch to regulate the flow of a chemical species comprising: an electrode; and a coating on the electrode, wherein the coating is formed from a composite comprising: a non-permanent magnetic microbead material; an ion exchange polymer; and a polymer with magnetic material contained therein in which a first form is paramagnetic and a second form is diamagnetic, wherein the

flux switch is actuated by reversibly converting from the paramagnetic form to the diamagnetic form when an externally applied magnetic field is turned on or off.

The above and other objects, advantages and features of the invention will become more apparent from the following description thereof taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows the influence of electrode orientation and solvent motion on magnetohydrodynamic fluid motion for one geometry.

FIG. 2 shows the influence of electrode orientation and solvent motion on magnetohydrodynamic fluid motion for a second geometry.

FIG. 3 shows the influence of electrode orientation and solvent motion on magnetohydrodynamic fluid motion for a third geometry.

FIGS. 4A and 4B show plots of km values for neutron-track etched polycarbonate/Nafion composites versus functions of pore diameter, d.

FIGS. 5A and 5B show the surface diffusion model assuming no limitations to the transport rate in the radial direction.

FIGS. 6A and 6B show the surface diffusion model including radial migration.

FIGS. 7A and 7B show km values of hydroquinone through polystyrene/Nafion composites for ratios of surface area of the microbeads to volume of Nafion.

FIG. 8 shows an analysis of fractal diffusion along the surface of the microbeads in polystyrene Microbead/Nafion composites.

FIG. 9 shows preliminary km values for neutron-track etched polycarbonate/poly(4-vinylpyridine) composites.

FIG. 10 shows Kk values for $\text{Ru}(\text{NH}_3)_6^{3+}$ as a function of volume fraction of microbeads in magnetic and nonmagnetic composites.

FIG. 11 shows the relative flux of redox species on the y-axis, where the maximum cyclic voltammetric current for a composite with magnetic microbeads is normalized by the maximum cyclic voltammetric current for a Nafion film containing no magnetic material, with the ratio giving the flux enhancement.

FIGS. 12A, 12B, and 12C show cyclic voltammetric results for the reversible species $\text{Ru}(\text{NH}_3)_6^{3+}$ and $\text{Ru}(\text{bpy})_2^{2+}$ and for the quasireversible species hydroquinone.

FIG. 13 shows a plot of the flux for seven redox species that is used for predicting a roughly five-fold flux enhancement of oxygen through a 15% magnetic Nafion composite over Nafion.

FIG. 14 shows a plot of the flux of $\text{Ru}(\text{NH}_3)_6^{3+}$ in magnetic bead/Nafion composites increasing as the fraction of magnetic beads increases.

FIG. 15A shows a simplified representation used to describe how magnetic microboundaries influence a standard electrochemical process.

FIG. 15B shows a simplified representation of embodiments of the invention placed in an externally applied magnetic field provided by an electromagnet to alter the magnetic properties of those embodiments, where the field may be turned on or off, or it may be oscillated.

FIG. 16 shows a simplified diagram of a separator with no electrode or conductive substrate which separates a mixture of particles between a first solution and a second solution.

FIG. 17 is a short summary of steps involved in a method of making an electrode according to two embodiments of the invention.

FIGS. 18A and 18B show a flux switch 800 to regulate the flow of a redox species according to yet another embodiment of the invention.

FIG. 19 shows a dual sensor 900 for distinguishing between a first species (particles A) and a second species (particles B).

FIG. 20 shows a cell 201 according to another embodiment of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Interfacial Gradients in General

It has been found that interfacial gradients of concentration, charge, dielectric constant, and potential tend to establish strong, interfacial forces which decay over a microstructural distance (1 to 100 nm). (For example, for an applied potential of 10 mV to 100 mV past the potential of zero charge at an electrode in 0.1 M aqueous electrolyte, the interfacial potential gradient (electric field) is 10^5 V/cm to 10^6 V/cm, but it decays over a distance of about 1 nm.) In a homogeneous matrix, with few interfaces, interfacial gradients have a negligible effect on bulk material properties. However, in a microstructured matrix where the ratio of surface area to volume is high, interfacial gradients can have a large effect on, or even dictate the properties of a composite. Models appropriate to the description of bulk materials have been found to be unsatisfactory when applied to these composites. Moreover, such composites provide an opportunity to design matrices to perform functions and exhibit properties not found in homogeneous materials, as will be discussed.

The effects of gradients, associated with the interfaces between the ion exchanger and its support matrix, to enhance the transport of ions and molecules have been studied in ion exchange polymer composites. The composites were formed by sorbing ion exchange polymers into high surface area substrates with well-established geometries. The flux of solutes through the composites was determined voltammetrically. When the solute flux through the ion exchange portion of the composites and the flux through simple films of the ion exchanger were compared, flux enhancements were observed. These enhancements were often greater than an order of magnitude. Consistently, the ratio of surface area of the substrate to the volume of sorbed ion exchanger (SA/Vol) has been the critical factor in quantifying the flux enhancements. The flux enhancement characteristics were found to be dominated by the interface between the ion exchanger and the support. Several interfacial gradients have so far been identified as important: concentration gradients, leading to surface diffusion; electric potential gradients, leading to migration; and magnetic field gradients, leading to flux enhancements and electric potential shifts at electrodes.

Forming Composites

Composites were made by intimately mixing two or more components to form a heterogeneous matrix as will be discussed in more detail below. While composites retain some characteristics of their components, properties distinct from those of the starting materials have been demonstrated that make composites of special interest.

Results

The impact of microstructure on transport and selectivity in ion exchange polymers and their composites has been

rotating disk voltammetry at 400 rpm for the bare electrode and at infinite rotation rate for the modified electrodes (See Table 1). The electrolyte concentration did not dramatically affect the flux for the bare electrode, the 30 nm membrane containing no Nafion, and the Nafion film.

TABLE 1

[H ⁺] _{soln}	Flux (nmol/cm ² s) for Dopamine Oxidation at Various [H ⁺]			
	400 rpm Flux unmodified	Flux 30 nm	Nafion Flux Film	Nafion Flux 30 nm
0.50M	38.6	54.8	4.2	2.4
0.10M	36.7	57.5	4.3	10.5
0.01M	44.6	73.1	—	39.0

However, for the 30 nm Nafion composite a fifty-fold decrease in electrolyte concentration led to >1600% increase in flux. Coupling of radial flux, driven by the interfacial potential gradient, to surface diffusion generates the enhancement. No enhancements were observed for a similar study of neutral hydroquinone. It should be noted that only charged species move by migration; dopamine is charged, while hydroquinone is not.

Since the selectivity coefficient for dopamine over protons is about 500 in Nafion, decreasing the electrolyte concentration fifty-fold only decreases the dopamine concentration by 10%. The dramatic effect produced by varying the proton concentration means that the protons, not the dopamine, compensate the wall charge to establish the interfacial potential gradient and enhance the radial flux of dopamine. This is possible because the dopamine, a cationic amine, is heavily ion paired to the sulfonic acid sites. With a dielectric constant of 20, substantial ion pairing can be anticipated in Nafion. Ion pairing may explain why the flux of cationic amines is lower than neutral hydroquinone as can be seen with reference to FIGS. 4A and 4B which show km values for neutron-track etched polycarbonate/Nafion composites. FIG. 4A shows km versus log(d), where d is the pore diameter. km increases above the values for bulk Nafion as d approaches 30 nm. The concentrations are 2 mM redox species and 0.1 M electrolyte for RuN+—Ruthenium (II) hexamine (□), H₂Q—Hydroquinone (Δ,▽), DOP+—Dopamine (○), and FerN+—Trimethylaminomethyl ferrocene (◇). The electrolyte is H₂SO₄ in all cases except for DOP+ and H₂Q(▽). Lines represent no model and are only intended to indicate the trend in the data. FIG. 4D shows km versus d⁻¹, where 4d⁻¹ is the surface area of the pore/volume of Nafion in the pore. As illustrated in FIGS. 6A and 6B, the slopes in FIG. 4B are indicative of the surface flux, and the intercept corresponds to the flux in bulk Nafion. Note, all the redox species except hydroquinone are charged amines, and all have lower flux than hydroquinone.

Vapor Phase Electrochemistry/Microstructure in Two-dimensions

One way to alter microstructure is to reduce the conduction matrix from three to two-dimensions. A two-dimensional system is made by sulfonating the nonionic, polymeric insulator between the electrodes of a microelectrode assembly. Conduction across the surface cannot be studied in either an electrolyte solution or a pure solvent as the liquid provides a conductive path between the electrodes. However, by supporting the microelectrode assembly in an evacuated flask, and injecting hydrogen or hydrogen chloride and a small amount (:L) of water, conduction can be

studied by electrolyzing the gas. In these lower dimensional systems, the role of the ion exchange site and its concentration, as well as the role of water in ionic conduction can be studied. Preliminary studies were performed to study conduction through solvent layers adsorbed from the vapor phase across the nonionic surface of a microelectrode assembly. Electrolysis of gas phase solvents required the solvent to adsorb at greater than monolayer coverage to bridge the gap between the electrodes. Solvents with high autoprotolysis and acidity constants sustain higher currents than solvents less able to generate ions. These studies provided information about gas phase electrochemical detection and systems as well as atmospheric corrosion.

Composites Formed with Polymerized Microspheres

To test the generality of flux enhancement by interfacial forces, composites of Nafion and polymerized polystyrene microbeads or microspheres were formed; diameters of 0.11 to 1.5 μm were used. FIGS. 7A and 7B show km of hydroquinone through polystyrene microbead/Nafion composites versus ratios of surface area of the microbeads to volume of Nafion. In particular, values of Km found for various ratios of bead surface area for transport to volume of Nafion for extraction (SA/Vol) are shown for three different bead diameters. As for the neutron track etched composites, linear plots were found, at least for the larger sizes, with intercepts comparable to bulk Nafion. Of these sizes, 0.37 μm beads exhibited the largest flux enhancement (600%). FIG. 7A shows results for composites formed with single size beads, where the ratio of surface area to volume was varied by varying the volume fraction of beads in the composites. Positive slopes are shown consistent with flux enhancement by surface diffusion along the surface of the beads. The intercepts are consistent with transport through bulk Nafion.

The fraction of microspheres in the composite can be varied and different sizes mixed to allow a continuous range of SA/Vol. In particular, FIG. 7B shows results for composites for a range of SA/Vol with 50% total fraction of Nafion by volume in the film. km increases as SA/Vol increases to about 3.5×10⁵ cm⁻¹, analogous to 1.3×10⁵ cm⁻¹ found for the neutron track etched composites (FIG. 4A). Scanning electron micrographs of the 50% Nafion, single bead size composites showed packing of the 0.11 μm beads was different and may account for the lower km values found for d⁻¹>3.5×10⁵ cm⁻¹, where 0.11 μm beads were used. FIG. 7B shows results for composites formed with 50% Nafion by volume. The ratio of surface area to volume was varied by making composites with beads of the same size and with beads of two different sizes. Flux increases as the ratio of surface area to volume increases to 3.5×10⁵ cm⁻¹; at the highest ratio, the composite contains 0.11 μm beads.

From the scanning electron micrographs, composites of beads larger than 0.11 μm exhibit the self-similarity typical of fractal materials. When ln(km) for these beads is plotted versus log(d), where d is the bead diameter, a linear plot with a slope of -0.733 was obtained; km versus d^{-0.733} is shown in FIG. 8. For diffusion on a fractal of finitely ramified structure (e.g., the Sierpinski gasket), this is the power dependence expected for diffusion in a two-dimensional system. Thus, microbead composites exhibit transport typical of fractal diffusion along the microbead surface. This system confirms that surface diffusion provides a mechanism of flux enhancement. It also introduces the concept of fractal transport processes and the importance of surface dimensionality in ion exchange composites.

Poly(4-Vinylpyridine) Composites Formed on Neutron Track Etched Membranes

To investigate surface diffusion in other ion exchangers, composites were formed of protonated poly(vinylpyridine (PVP)) and track etched membranes. From preliminary results, flux enhancements in these composites increased with d (volume/surface area); see FIG. 9. Such a dependency may be consistent with a transport rate which varies monotonically in the radial coordinate. Physically, a non-uniform density of PVP, produced by interaction with the wall charge, could generate a radially dependent transport rate.

Thermal Processing of Nafion

While commercial Nafion is heat cast, a process that yields inverted micelles, the vast majority of academic studies of Nafion have been performed on cold cast Nafion which produces normal micelles. A study of the mechanical properties of Nafion hot cast from organic solvents has been reported. Attempts have been made to hot cast Nafion films with microwave heating. In the highly ionic casting solution, the glass transition temperature of Nafion (105° C.) should be reached as the water evaporates. Plots of flux as a function of the time microwaved have a break at approximately 15 minutes. The flux changed by no more than a factor of three with a decrease in the flux of hydroquinone, and from preliminary studies, an increase in the flux of $\text{Ru}(\text{NH}_3)_6^{3+}$. This may indicate different transport mechanisms for the two species in the film. Microwaved, cold cast and commercial hot cast films have been compared.

Magnetic, Demagnetized, and Nonmagnetic Composites

Polystyrene coated, 1 to 2 μm Fe/Fe oxide (nonpermanent magnetic material) or organo-Fe (superparamagnetic or ferrofluid or permanent magnetic) microbeads are available (Bangs Labs or Polyscience) as a 1% suspension in water, and Nafion (C.G. Processing) is available as a 5% suspension in alcohol/water (other inert or active polymer coatings besides polystyrene could be employed as well, and in non-aqueous environments, it is possible to eliminate the polymer coating completely to provide uncoated microbeads if, for example, its purpose is normally only to prevent oxidation in an aqueous environment). This discussion holds for superparamagnetic or ferrofluid or permanent magnetic or nonpermanent magnetic or ferromagnetic or ferrimagnetic material microbeads in general. This discussion also holds for other magnets and other magnetic materials which include, but are not limited to, superconductors, and magnetic materials based on rare earth metals such as cobalt, copper, iron, samarium, cerium, aluminum and nickel, and other assorted metal oxides, and magnetic materials based on neodymium, e.g., magnequench, which contains iron and boron in addition to neodymium. The polymer coatings are required for use of these microbeads in an aqueous environment to prevent oxidation, but in a nonaqueous environment the polymer coating may not be required. Magnetic composites incorporating organo-Fe material microbeads are formed by casting appropriate volumes of each suspension onto an electrode centered inside a cylindrical magnet (5 cm inside diameter, 6.4 cm outside diameter, 3.2 cm height; 8 lb pull). Once the solvents evaporate and the magnet is removed, the oriented beads are trapped in the Nafion, stacked in pillars normal to the electrode surface. To minimize interbead repulsion, pillars form by stacking the north end of one bead to the south end of another; to minimize interpillar repulsion, the pillars arrange in a

roughly hexagonal array. These aligned composites were formed with microbead fractions of $\leq 15\%$. Aligned composites were compared to other composites: unaligned composites—formed as above but with Fe/Fe oxide microbeads and without the magnet; nonmagnetic composites—formed with 1.5 μm nonmagnetic polystyrene beads; simple Nafion films; and demagnetized composites—aligned composites that were demagnetized. Demagnetized composites had the pillared structure, but it is not clear if they were fully demagnetized. Nonmagnetic composites had a coral-like structure (i.e., they do not form pillars). Note, composites may be formed wherein at least one component is reversibly changeable between a paramagnetic form and a diamagnetic form with, for example, a temperature variation with or without the presence of an externally applied magnetic field.

Magnetic Composites

Electrochemical Studies of Magnetic Composites

The composite was equilibrated in a solution of 1 mM electro-active species and 0.1 M electrolyte. The mass transport-limited current for the electrolysis of the redox species through the composite (i_{meas}) was then determined by steady-state rotating disk voltammetry at several different rotation rates (ω). A plot of i_{meas}^{-1} versus ω^{-1} yielded a slope characteristic of transport in solution, and an intercept characteristic of transport through the composite as:

$$\frac{nFA}{i_{meas}} = \frac{v^{1/6}}{0.62 c^* D_{soln}^{2/3}} \omega^{-1/2} + \frac{l}{K m \epsilon c^*} \quad (3)$$

In Equation (3), n is the number of electrons, F is the Faraday constant, A is the electrode area, c^* and D_{soln} are the concentration and diffusion coefficient of the redox species in solution, respectively, v is the kinematic viscosity, l is the composite thickness, k is the partition coefficient of the redox species, m is the mass transport rate of the redox species in the composite, and ϵ is the porosity of the composite. The partition coefficient, k , is the ratio of the equilibrium concentration in the ion exchange portion of the composite to the solution concentration, in the absence of electrolysis. Equation (3) is appropriate for rate-limiting transport perpendicular to the electrode. This is ensured by choosing l and $D_{soln}^{1/3} \omega^{1/2} v^{1/6}$ large compared to the microstructural dimensions of the composite, and is verified by the slope. Then, the composite can be treated as homogeneous with an effective km , and microstructural effects can be ascertained with rotating disk studies. Cyclic voltammetry yielded quantitative information for scan rates, v , sufficient to contain the transport length within the composite. For a reversible couple, the peak current, i_{peak} , is

$$i_{peak} = 0.4463 (nF)^{1/2} [v/RT]^{1/2}, \quad (4)$$

where R is the gas constant and T is the temperature. When both rotating disk and cyclic voltammetry data are obtainable, k and m are separable because of their different power dependencies in Equations (3) and (4).

The flux of redox species through magnetic composites is enhanced in proportion to the absolute value of the difference in the magnetic susceptibilities of the products and reactants of the electrolysis. From cyclic voltammetry, the ΔE_p observed for reversible species, whether paramagnetic or diamagnetic, was little changed, but $E_{0.5}$ was shifted, where $E_{0.5}$ is the average of the anodic and cathodic peak potentials, and is a rough measure of the free energy of the

electron transfer reaction. For a quasireversible, diamagnetic species which passed through a radical intermediate, dramatic changes in ΔE_p were found. The shifts and peak splittings were consistent with the stabilization and the concentration of the paramagnetic species. Results are summarized below.

Flux Enhancements for Paramagnetic Species

Values of k_m found by rotating disk voltammetry for diamagnetic hydroquinone and $\text{Ru}(\text{bpy})_3^{2+}$, and paramagnetic $\text{Ru}(\text{NH}_3)_6^{3+}$ using Nafion films, nonmagnetic polystyrene microbead composites, and magnetic microbead composites are summarized in Table 2. Both bead composites contained 15% beads of 1 to 2 μm diameter; all modifying layers were 3.6 to 3.8 μm thick.

TABLE 2

km ($10^{-6}\text{cm}^2/\text{s}$) for Various Magnetic/Nonmagnetic Species and Films			
	km _{Nafion film}	km Nonmagnetic	km Magnetic
Hydroquinone	0.925	1.02	2.21
$\text{Ru}(\text{bpy})_3^{2+}$	0.290	0.668	0.869
$\text{Ru}(\text{NH}_3)_6^{3+}$	0.570	1.01	3.80

In these examples, as in general, when flux of redox species through the magnetic composite was compared to flux through either Nafion films or composites formed with nonmagnetic beads, the flux was enhanced. In general, we find the flux enhancement is not dependent on whether the electrolysis is converting a diamagnetic to a paramagnetic species or a paramagnetic to a diamagnetic species, but that the enhancement increases as the absolute value of the difference in the molar magnetic susceptibilities of the product and reactant.

To further investigate paramagnetic $(\text{Ru}(\text{NH}_3)_6^{3+})$, k_m values were found for magnetic and nonmagnetic composites made with various fractions of beads. Results are shown in FIG. 10. First, in FIG. 10 the flux of $\text{Ru}(\text{NH}_3)_6^{3+}$ increased strongly with the fraction of magnetic beads, but not with the fraction of nonmagnetic beads. Second, since the enhancement is not linear with the magnetic bead fraction, the enhancement was not due to either a simple concentration increase of the paramagnetic species about each bead or a simple increase in surface diffusion associated with more pillars at higher bead concentration. (Data are equally well linearized with correlation coefficient >0.99 as either $\ln[k_m]$ versus percent beads, or k_m versus volume of Nafion/surface area of the beads. Plots of both showed intercepts comparable to k_m for simple Nafion films.) Third, substantially higher flux was achieved with the magnetic beads than with the same fraction of nonmagnetic beads.

Magneto-hydrodynamic models neither account for the discrimination between paramagnetic and diamagnetic species by the magnetic composites, nor do they predict the shape of the curve shown in FIG. 10.

Electrochemical flux of various redox species from solution through either composites or films to the electrode surface was determined by cyclic and steady-state rotating disk voltammetry. Electrochemical flux of species through the composites is parameterized by k and m , where k is the extraction coefficient of the redox species from solution into the composite, and m (cm^2/s) is its effective diffusion coefficient. For steady-state rotating disk voltammetry, the parameterization is k_m (determined from the intercept of a

Koutecky Levich plot), and for cyclic voltammetry, the parameterization is $\text{km}^{1/2}$ (extracted from the slope of peak current versus the square root of the scan rate (20 to 200 mV/s)). All measurements were made in solutions containing 1 to 2 mM redox species at a 0.45 cm^2 glassy carbon electrode. The electrolyte was 0.1 M HNO_3 , except for the reduction of $\text{Co}(\text{bpy})_3^{2+}$ (0.2 M Na_2SO_4) and for the oxidation of $\text{Co}(\text{bpy})_3^{2+}$ and reduction of $\text{Co}(\text{bpy})_3^{3+}$ (0.1 M sodium acetate/acetic acid buffer at $\text{pH}=4.5$). Anionic ferricyanide was not detected electrochemically through the anionic Nafion films and composites, consistent with defect-free layers. All potentials were recorded versus SCE.

First, k_m values were determined for the oxidation of paramagnetic $\text{Ru}(\text{NH}_3)_6^{3+}$ to diamagnetic $\text{Ru}(\text{NH}_3)_6^{2+}$ through magnetic and nonmagnetic composites as the bead fraction was increased. $|\Delta\chi_m|=1,880\times 10^{-6}\text{ cm}^3/\text{moles}$. From FIG. 10, k_m for the nonmagnetic composites varies little with bead fraction, while k_m for the magnetic composites increases superlinearly by several fold.

Second, $\text{km}^{1/2}$ values were determined for various redox reactions for magnetic composites, nonmagnetic composites, and Nafion films. Exclusive of any magnetic field effects, electrochemical flux through Nafion can be altered by the size, charge, and hydrophobicity of the transported species, interaction and binding with the exchange sites, and intercalation into the hydrated and perfluorinated zones of the Nafion. To minimize effects not related to interactions between the redox moieties and the magnetic beads, $\text{km}^{1/2}$ values for the magnetic and nonmagnetic composites are normalized by $\text{km}^{1/2}$ for the Nafion films. The normalized $\text{km}^{1/2}$ values are plotted in FIG. 11 versus $|\Delta\chi_m|$ for the various redox reactions. FIG. 11 illustrates the relative flux of redox species on the y-axis, where the maximum cyclic voltammetric current for a composite with magnetic microbeads is normalized by the maximum cyclic voltammetric current for a Nafion film containing no magnetic material. The ratio is the flux enhancement. On the x-axis is the absolute value of the difference in the molar magnetic susceptibilities of the products and reactants of the electrolysis, $|\Delta\chi_m|$. The composites contain 15% magnetic microbeads and 85% Nafion by volume. The redox species are numbered as follows, where the reactant products are listed sequentially: (1) hydroquinone to benzoquinone; (2) $\text{Cr}(\text{bpy})_3^{3+}$ to $\text{Cr}(\text{bpy})_3^{2+}$; (3) $\text{Ru}(\text{bpy})_3^{2+}$ to $\text{Ru}(\text{bpy})_3^{3+}$; (4) $\text{Ru}(\text{NH}_3)_6^{3+}$ to $\text{Ru}(\text{NH}_3)_6^{2+}$; (5) $\text{Co}(\text{bpy})_3^{2+}$ to $\text{Co}(\text{bpy})_3^{1+}$; (6) $\text{Co}(\text{bpy})_3^{2+}$ to $\text{Co}(\text{bpy})_3^{3+}$; and (7) $\text{Co}(\text{bpy})_3^{3+}$ to $\text{Co}(\text{bpy})_3^{2+}$. All redox species are 1 mM to 2 mM . Film thicknesses are 3.6 micrometers to 3.8 micrometers. For the nonmagnetic composites, the normalized $\text{km}^{1/2}$ values are independent of $|\Delta\chi_m|$. This suggests the normalization is effective in minimizing steric and electrostatic differences in the interactions of the various redox species with Nafion. For the magnetic composites, normalized $\text{km}^{1/2}$ increases monotonically with $|\Delta\chi_m|$, with the largest enhancements approaching 2000%.

The logarithmic increase of electrochemical flux in FIG. 11 with $|\Delta\chi_m|$ is consistent with a free energy effect of a few kJ/mole . Effects of this magnitude have not been generated in uniform, macroscopic magnetic fields. Strong, non-uniform magnetic fields established over short distances (a few nanometers) at the interface between Nafion and magnetic microbeads could produce local effects of this magnitude. Magnetic concepts appropriate to uniform macroscopic magnetic fields and to molecular magnetic interactions are not applicable to this system, and instead, a microscopic parameterization is necessary. Establishing sufficiently strong and nonuniform local magnetic fields at

interfaces in microstructured systems makes it possible to orchestrate chemical effects in micro-environments which cannot otherwise be achieved with uniform fields applied by large external magnets.

Cyclic Voltammetric Peak Splittings for Quasireversible Species

Peak splittings in cyclic voltammetry are used to determine heterogeneous electron transfer rates. FIGS. 12A and 12B show cyclic voltammetric results for the reversible species $\text{Ru}(\text{NH}_3)_6^{3+}$ and $\text{Ru}(\text{bpy})_3^{2+}$, respectively. Cyclic voltammograms at 100 mV/s are shown for $\text{Ru}(\text{NH}_3)_6^{3+}$ (FIG. 12A) and $\text{Ru}(\text{bpy})_3^{2+}$ (FIG. 12B) for magnetic composites, Nafion films, and the bare electrode. Cyclic voltammetric results are shown for the reduction of paramagnetic $\text{Ru}(\text{NH}_3)_6^{3+}$ in FIG. 12A. The concentration of the redox species is 1 mM, and the electrolyte is 0.1 M HNO_3 ; the reference is an SCE; and the films are 3.6 μm thick. For both species, when $E_{0.5}$ is compared for the magnetic composite and the Nafion films, the shift in $E_{0.5}$ is to positive potentials. The electron transfer kinetics for $\text{Ru}(\text{NH}_3)_6^{3+}$ are fairly strong with $k^0 > 0.2$ cm/s. Note that the peak splittings for the magnetic composites and Nafion film are similar, consistent with the resistance of the two layers being similar. Similar peak splittings are also observed for $\text{Ru}(\text{bpy})_3^{2+}$, as shown in FIG. 12B. Therefore, when compared to the Nafion films, the magnetic composites have little effect on the rate of electron transfer of reversible species.

In particular, FIG. 12C shows cyclic voltammograms at 100 mV/s for 1 mM hydroquinone in 0.1 M HNO_3 for magnetic composites, nonmagnetic composites, Nafion films, and the bare electrode. The films are 3.6 μm thick. It is observed in the voltammogram of FIG. 12C that the peak splitting is almost doubled for the magnetic composite compared to the Nafion film. The question arises as to whether the enhanced peak splitting is consistent with the stabilization of the paramagnetic semiquinone intermediate in the two electron/two proton oxidation. In FIG. 12C, voltammograms are shown at 0.1 V/s for hydroquinone, a diamagnetic species that undergoes quasireversible, two electron/two proton oxidation to diamagnetic benzoquinone while passing through a radical, semiquinone intermediate. The voltammograms for the Nafion film and the nonmagnetic composites are fairly similar, with ΔE_p values of 218 and 282 mV, respectively. For the magnetic composite, $\Delta E_p = 432$ mV, or twice that of the Nafion film. From the results for the reversible couples above, this is not due to a higher resistance in the magnetic composites. The asymmetry in the peak shifts compared to the other three systems shown in FIG. 12C also argues against a resistance effect. (Note that the interpretation of the kinetics can be complicated by the proton concentration. However, there is no reason to think the concentration is drastically different in the magnetic and nonmagnetic composites.) The peak shift may be due to the stabilization of the paramagnetic semiquinone intermediate.

While the hydroquinone electrolysis is too complex to interpret cleanly, it does raise the interesting question of whether quasireversible electron transfer rates can be influenced by an applied magnetic field. Reversible rates will not be affected, but it is not clear what would happen with quasireversible rates. There are many quasireversible electron transfer species uncomplicated by homogeneous kinetics and disproportionation reactions which can be used to better resolve this question. If the kinetics of quasireversible processes can be influenced by magnetic fields, numerous technological systems could be improved.

Cyclic Voltammetric Peak Shifts

When magnetic composites and Nafion films were compared, voltammograms taken at 0.1 V/s for the reversible species exhibited no change in ΔE_p . However, the peak potential for reduction, E_p^{red} , for $\text{Ru}(\text{NH}_3)_6^{3+}$ was shifted 14 mV positive. Similarly, the oxidation potential peak, E_p^{ox} , for $\text{Ru}(\text{bpy})_3^{2+}$ was shifted 64 mV positive. Shifts of $E_{0.5}$ while ΔE_p is unchanged are consistent with one species being held more tightly in the composites, and thereby, having a lower diffusion coefficient. In general, a shift in potential of approximately +35 mV is observed for all reversible redox species, whether the electron transfer process converts the redox species from diamagnetic to paramagnetic or paramagnetic to diamagnetic. Larger potential shifts are observed with less reversible electron transfer processes. Shifts as large as 100 mV have been observed. (Note that for the film thicknesses used herein (~3.6 μm) and a scan rate of 0.1 V/s, $m \leq 10^{-8}$ cm²/s is needed for the diffusion length to be confined within the film during the sweep. Since m is not known in these systems, it is not clear whether the voltammetric results also probe behavior at the composite/solution interface.)

The above discussion further shows that interfacial gradients other than concentration and electric potential, e.g., magnetic gradients, can be exploited effectively in microstructured matrices. In composites formed with magnetic materials, locally strong (and nonuniform) magnetic fields could alter transport and kinetics. The influence of the magnetic field on species in composites may be substantial because the species are concentrated in a micro-environment, where the distance between the field source and chemical species is not large compared to the field decay length. Magnetic composites were made by casting films of polystyrene coated magnetic beads and the perfluorinated, cation exchange polymer, Nafion, onto an electrode. Approximately 1 μm diameter magnetic beads were aligned by an external magnet as the casting solvents evaporated. Once the solvents evaporated and the external magnet was removed, the beads were trapped in the Nafion, stacked as magnetic pillars perpendicular to the electrode surface.

Preliminary voltammetric studies comparing the magnetic composites to simple Nafion films yielded several interesting results. First, flux of redox species through magnetic microbead composites is enhanced compared to flux through both simple Nafion films and composites formed with nonmagnetic microbeads. Second, for species which underwent reversible electron transfer (i.e., $\text{Ru}(\text{NH}_3)_6^{3+}$ and $\text{Ru}(\text{bpy})_3^{2+}$) the cyclic voltammetric peak potential difference (ΔE_p) was unaffected, but the average of the peak potentials ($E_{0.5}$) shifted consistent with the stabilization of the paramagnetic species. Third, hydroquinone oxidation was quasireversible and proceeded through paramagnetic semiquinone. For hydroquinone at 0.1 V/s, voltammograms for the magnetic composites exhibited a 40 mV positive shift of $E_{0.5}$ and a ΔE_p twice that of Nafion. The potential shifts and flux enhancements, while consistent with concentration and stabilization of the paramagnetic form of the redox couples, are as yet unexplained.

Electrochemical flux of ions and molecules through magnetic composites formed of Nafion ion exchange and polystyrene coated Fe/Fe oxide particles has been observed to be as much as twenty-fold higher than the flux through simple Nafion films. Flux enhancements have been observed with increasing difference in the magnetic susceptibility of the halves of the redox reaction.

A passive, magnetic composite may be used to enhance the flux of oxygen at the cathode in a fuel cell. Oxygen has

two unpaired electrons, and is therefore susceptible to this magnetic field in the same way as described in the experiments above. If oxygen is consistent with the observations made thus far for other ions and molecules, the electrochemical flux of oxygen to a magnetically modified cathode can be enhanced by approximately 500% as compared to a nonmagnetic cathode (FIG. 13). Such an enhancement would be comparable to that achieved by pressurization to 5 atmospheres at the cathode.

Based on the above discussion, it is possible to predict a roughly five-fold flux enhancement of oxygen through a 15% magnetic/Nafion composite over Nafion. This is understood by considering the fluxes through magnetic/Nafion composites and Nafion films of the seven redox species listed in the upper left hand corner of FIG. 13 and are the same species as listed in FIG. 11. The fluxes were determined by cyclic voltammetry. The flux ratio for magnetic composites to Nafion films is the y-axis and the absolute value of the difference in the molar magnetic susceptibilities ($|\Delta\chi_m|$) of products and reactants of the electrolysis reaction is the x-axis of FIG. 13, respectively. (The larger the value of $\Delta\chi_m$, the more susceptible a species is to interaction with a magnetic field.) From FIG. 13, the flux increases exponentially as $|\Delta\chi_m|$ increases. For the most extreme case, the flux is increased about twenty-fold. For the reduction of oxygen to water, $|\Delta\chi_m| \approx 3500 \times 10^{-6} \text{ cm}^3/\text{mole}$. This point on the x-axis is extrapolated to therefore suggest that the flux enhancement for oxygen in the magnetic composite will approach five-fold.

Experiments have been conducted with Nafion composites of up to 15% Fe/Fe oxide particle beads. FIG. 14 shows a curve of the increase in flux based on the percentage of magnetic beads. The dotted line on FIG. 14 is the projected effect on flux of higher bead concentrations.

For paramagnetic species, the flux through the magnetic composites increases as the fraction of magnetic beads increases. In FIG. 14, the flux of $\text{Ru}(\text{NH}_3)_6^{3+}$ through magnetic bead/Nafion composites (●) increases as the fraction of magnetic beads in the composite is increased to 15%. Larger enhancements may be possible with higher bead fraction composites or composites formed with magnetic beads containing more magnetic material. Compared to a simple Nafion film (□), the flux is 4.4 fold larger. $\text{Ru}(\text{NH}_3)_6^{3+}$ is less paramagnetic than oxygen. For comparison, composites formed with nonmagnetic polystyrene beads (○) were examined; these exhibited no flux enhancement as the bead fraction increased. The line shown on the plot is generated as a logarithmic fit to the data for the magnetic composites. It illustrates the flux enhancement that might be found for composites formed with a higher fraction of magnetic beads. The extrapolation suggests that at 30% magnetic beads, the flux through the magnetic composites of $\text{Ru}(\text{NH}_3)_6^{3+}$ might approach twenty times its value in simple Nafion films. As oxygen is more paramagnetic than $\text{Ru}(\text{NH}_3)_6^{3+}$ even larger enhancements might be anticipated for oxygen.

Oxygen Susceptibility to Magnetic Composites and Magnetic Concepts

Paramagnetic molecules have unpaired electrons and are drawn into (aligned by) a magnetic field (i.e., a torque will be produced; if a magnetic field gradient exists, magnetic dipoles will experience a net force). Radicals and oxygen are paramagnetic. Diamagnetic species, with all electrons paired, are slightly repelled by the field; most organic molecules are diamagnetic. (Metal ions and transition metal

complexes are either paramagnetic or diamagnetic.) How strongly a molecular or chemical species responds to a magnetic field is parameterized by the molar magnetic susceptibility, χ_m (cm^3/mole). For diamagnetic species, χ_m is between $(-1 \text{ to } -500) \times 10^{-6} \text{ cm}^3/\text{mole}$, and is temperature independent. For paramagnetic species, χ_m ranges from 0 to $+0.01 \text{ cm}^3/\text{mole}$, and, once corrected for its usually small diamagnetic component, varies inversely with temperature (Curie's Law). While ions are monopoles and will either move with or against an electric field, depending on the sign of the potential gradient (electric field), paramagnetic species are dipoles and will always be drawn into (aligned in) a magnetic field, independent of the direction of the magnetic vector. A net force on a magnetic dipole will exist if there is a magnetic field gradient. The magnetic susceptibilities of species relevant to this proposal are summarized below.

TABLE 3

Molar Magnetic Susceptibilities, χ_m		
Species	Temperature (° K.)	$\chi_m (10^{-6} \text{ cm}^3/\text{mole})$
O_2	293	3449
H_2O	293	-13
H_2O_2	—	-18

Magnetic field effects were observed in electrochemical systems. Because electrochemistry tends to involve single electron transfer events, the majority of electrochemical reactions should result in a net change in the magnetic susceptibility of species near the electrode. Little has been reported, however, in electrochemistry on magnetic fields. What has been reported relates to magnetohydrodynamics. Magnetohydrodynamics describes the motion of the charged species (i.e., an ion) perpendicular to the applied magnetic field and parallel to the applied electric field (Lorentz force). In the composites described herein, the magnetic field, the direction of motion, and the electric field were all normal to the electrode. Because magnetohydrodynamics (see FIGS. 1-3) does not predict a motion dependence on the magnetic susceptibility of the moving species and requires that all the field and motion vectors are perpendicular (i.e., for magnetic effects), the effects described here are unlikely to be macroscopic magnetohydrodynamic effects.

Graded Density Composites

The following protocol is used to form graded density layers on electrodes with the density layers parallel to the electrode surface or other surface: Solutions of Ficoll (a commercially available copolymer of sucrose and epichlorohydrin used to make macroscopic graded density columns for separations of biological cells by their buoyancy) are made in water at concentrations varying from a few percent to 50% by weight. The viscosity of the solution is a monotonic function of the weight percent polymer. Small volumes of polymer solution (5 to 100 microliters) are pipetted onto an electrode surface and the electrode spun at 400 rpm for two minutes; this creates a single polymer layer. By repeating this process with polymer solutions of different concentrations, a graded interface with density and viscosity varied as a function of the composition of the casting solution can be created in the form of a discontinuous density gradient and/or a discontinuous viscosity gradient. The thickness of each step in the resultant multi-layered or laminate structure depends on the number of layers cast of a given concentration, and can range from 200 nm to several micrometers.

A similar structure with graded layers of ion exchange sites in ion exchange polymers can be formed by either (1) spin casting or coating a mixture of density gradient polymer and ion exchange polymer on the electrode or other surfaces as described above; (2) forming a density graded layer of density gradient polymer first, and then adsorbing the ion exchange polymer into the matrix or; (3) spin casting or coating layers of ion exchange polymer on surfaces from solutions or suspensions of different concentrations. It should be possible to cast such layers, and then peel them off surfaces to form free standing films. Such films would have utility in controlling solvent transport across electrochemical cells, including fuel cells.

A protocol is proposed to form graded density layers on electrodes with the density layers perpendicular to the electrode surface or other surface. Electrodes and surfaces can be envisioned in which more than one gradient is established on the surface for purposes of separating molecules in more than one spatial and temporal coordinate and by more than one property. One example is to form composites with a magnetic gradient in one coordinate and a density gradient in the other. These materials could be formed by creating a magnetic gradient perpendicular to the electrode surface by placing magnetic beads on an electrode or surface and allowing the composite to be cast in a nonuniform field, where the external magnet is aligned so the beads are on the surface but not in columns perpendicular to the surface. A density layer could be cast (as opposed to spun cast or coated) by pipetting small volumes of different concentrations of density gradient polymer and/or ion exchange polymer and allowing the solvents to evaporate, thereby building up a graded layer parallel to the electrode surface. Once the entire layer is cast, the external magnet can be removed if the magnetic material is superparamagnetic, and left in place if the magnetic material is paramagnetic.

These would be fairly sophisticated composites, and complex to understand, but unusual flux enhancements and separations should be possible in several dimensions. It should be possible to design even more complex structures than these.

Modified Ion Exchangers

The surface of the magnetic microbeads have ion exchange groups on them which would allow ready chemical modification, e.g., coating with a magnetically oriented liquid crystal for a local flux switch. Examples of such modified structures may have use in the quest to build microstructured devices and machines.

APPLICATIONS

General Applications

FIG. 15A shows a simplified representation which will be used to describe how magnetic gradients at boundary regions **33** influence a standard electrochemical process. Here, a substrate **20** with a surface **24** serves as a conductor and hence can electrically conduct like a metal, a semiconductor or a superconductor. Substrate **20** is maintained at a first potential **V1**. Two different phases of materials **30a** and **30b** have two different magnetic fields, i.e., are in two different magnetic phases, phase 1 and phase 2 and are applied to surface **24** of substrate **20**. Since materials **30a** and **30b** have different magnetic fields, boundary regions or boundaries **33** have magnetic gradients. Boundary regions **33** are not necessarily sharp or straight, but the magnetic

field of material **30a** smoothly changes into the magnetic field of material **30b** according to electromagnetic boundary conditions. Therefore, width t represents an average width of boundaries **33**. Width t should be approximately between a one nanometer to a few micrometers and preferably between one nanometer and approximately 0.5 micrometers. Boundary regions **33** are separated from each other by varying distances and S represents the average of these distances. The effect of varying distances S will be described below.

Particles **M** have a magnetic susceptibility χ_m and are in an electrolyte **40** which is at a potential **V2** due to an electrode **50**. This makes a potential difference of V between electrolyte **40** and substrate **20** (substrate **20** can effectively act as a second electrode). Boundary regions **33** are paths which can pass particles **M**. Particles **M** are then either driven electrically or via a concentration gradient toward substrate **20**. Once particles **M** reach substrate **20**, they either acquire or lose electrons, thereby turning into particles **N** with magnetic susceptibility χ_n . The absolute value of the difference between the magnetic susceptibilities of phase 1 and phase 2 is a measure of the magnitude of the magnetic gradient in region **33** and will be referred to as the magnetic gradient of boundary region **33**. It will be shown below that the flux of particles **M** increases approximately exponentially with respect to increasing the magnetic gradient of boundary region **33** with materials **30a** and **30b** when compared to the flux without materials **30a** and **30b**. This increase in flux can be over a factor of 35 or 3500% resulting in significant improvements in efficiency of many electrochemical processes.

Specific examples of electrochemical systems where magnets might improve an electrochemical cell or process include: chloralkali processing, electrofluoridation, corrosion inhibition, solar and photocells of various types, and acceleration of electrochemical reactions at the electrode and in the composite matrix. Potential shifts of $E_{0.5}$ are always observed and suggest an energy difference is generated by the magnetic fields and gradients in the composites; generically, this could improve performance of all electrochemical energy devices, including fuel cells, batteries, solar and photocells. Other applications include sensors, including dual sensors for parametric species; optical sensors; flux switching; and controlled release of materials by control of a magnetic field, including release of drugs and biomaterials. There may also be applications in resonance imaging technology.

Boundaries **33** do not have to be equally spaced and do not have to have equal widths or thicknesses t . Materials **30a** and **30b** can be liquid, solid, gas or plasma. The only restriction is that a boundary **33** must exist, i.e., materials **30a** and **30b** must have two different magnetic fields to create the magnetic gradient within the width t . The magnetic gradient of region **33** can be increased by (1) increasing the magnetic content of the microbeads; (2) increasing the bead fraction in the composite; (3) increasing the magnetic strength of the beads by improving the magnetic material in the beads; and (4) enhancing the field in the magnetic microbeads by means of an external magnet. In general, the flux of particles **M** and **N** is correlated with magnetic susceptibility properties, χ_m and χ_n . The above phenomena can be used to improve performance of fuel cells and batteries.

FIG. 15B shows apparatus **80** which corresponds to any of the above discussed embodiments as well as the embodiments shown in FIG. 16 or thereafter. Some of the embodiments in their implementation require the presence of a magnetic field such as that produced by electromagnet **70**

and some of the embodiments do not require electromagnet 70, although they can do so. Apparatus 80 corresponds to, for example, some embodiments of the magnetically modified electrode, the fuel cell, the battery, the membrane sensor, the dual sensor, and the flux switch. Electromagnet 70 can be any source of a magnetic field. Electromagnet 70 can also be used in the above discussed methods of forming the composite magnetic materials that require the presence of an externally applied magnetic field. Electromagnet 70 can be controlled by controller 72 to produce a constant or oscillating magnetic field with power supplied by power supply 74.

FIG. 16 shows another simplified diagram showing a second manifestation of the above described phenomenon and hence a second broad area of application. Namely, FIG. 16 shows a separator 60 arranged between a first solution 62a and a second solution 62b, separator 60 includes first and second materials 30a and 30b having two different magnetic fields; materials 30a and 30b have boundaries 33 there between. Here, there is no electrode or conductive substrate 20. Solution 62a has at least two different types of particles M_1 and M_2 with two different magnetic susceptibilities χ_{m1} and χ_{m2} , respectively. Once particles M_1 or M_2 drift into an area near any one of boundaries 33, they are accelerated through the boundaries 33 by the magnetic gradient therein. Here, χ_{m1} is greater than χ_{m2} , which causes the flux of particles M_1 through separator 60 to be greater than the flux of particles M_2 through separator 60. This difference in flux can again be over a factor of 35 or 3500%, and may somewhat cancel out any difference in acceleration due to different masses of particles M_1 and M_2 . Consequently, if the above process is allowed to proceed long enough, most of the particles M_1 will have passed through separator 60 before particles M_2 , thereby making first solution 62a primarily made up of particles M_2 and second solution 62b primarily made up of particles M_1 . Note, separation of particles M_1 and M_2 may require some special tailoring of the separator 60 and also relies on how much time is allowed for particles M_1 and M_2 to separate. In an infinite amount of time, both particles M_1 and M_2 may cross separator 60. Particle size may also have a bearing on the ultimate separation of particles M_1 and M_2 by separator 60.

The above discussion with respect to FIG. 16 involves two types of particles, M_1 and M_2 , but the discussion also holds for any number of particles. Consider, for example, solution 62a having particles M_1 , M_2 , M_3 and M_4 with susceptibilities χ_{m1} , χ_{m2} , χ_{m3} and χ_{m4} , respectively. If $\chi_{m1} > \chi_{m2} > \chi_{m3} > \chi_{m4}$, then M_1 would pass more easily through separator 60, followed by M_2 , M_3 , and M_4 . The greater the difference between magnetic susceptibilities, the better the separation. The above phenomenon can be used to improve performance of fuel cells and batteries. Other applications include separation technology in general, chromatographic processes—including separation of higher transition metal species (lanthanides and actinides), and photography.

In the above discussion with respect to FIGS. 15 and 16, the greater the number of boundary regions 33 per unit area (i.e., the smaller S), the greater the effects due to the presence of boundary regions 33 macroscopically manifest themselves. S can vary from fractions of a micrometer to hundreds of micrometers. In quantum systems with smaller structures, S is further reduced to less than approximately 10 nm.

Design paradigms are summarized below to aid in tailoring composites for specific transport and selectivity functions.

Forces and gradients associated with interfaces, which are of no consequence in bulk materials, can contribute to and even dominate the transport processes in composites.

Increasing the microstructure of composites can enhance the influence of interfacial gradients.

The closer a molecule or ion is placed to the interface, the stronger the effect of the interfacial field on the chemical moiety. Systems should be designed to concentrate molecules and ions near interfaces.

The ratio of surface area for transport to volume for extraction parameterizes surface transport.

Fields in a microstructural environment can be non-uniform, but locally strong.

Strong but short range electrostatic and magnetic fields are better exploited in microstructured environments than in systems with externally applied, homogeneous fields.

Vectorial transport is plumbed into microstructured matrices by coupling two or more field or concentration interfacial gradients; the largest effects will occur when the gradients are either perpendicular or parallel to each other.

Control of surface dimensionality (fractality) is critical in optimizing surface transport in composites.

Several advantages are inherent in ion exchange composites over simple films. First, composites offer properties not available in simple films. Second, composites are readily formed by spontaneous sorption of the ion exchanger on the substrate. Third, while surfaces dominate many characteristics of monolayers and composites, three-dimensional composites are more robust than two-dimensional monolayers. Fourth, interfaces influence a large fraction of the material in the composite because of the high ratio of surface area to volume. Fifth, composites offer passive means of enhancing flux; external inputs of energy, such as stirring and applied electric and magnetic fields, are not required. Sixth, local field gradients can be exploited in composites because the fields and molecular species are concentrated in a micro-environment where both the decay length for the field and the microstructural feature length are comparable. In some of the composites, the field may be exploited more effectively than by applying an homogeneous field to a cell with an external source.

SPECIFIC EXAMPLES

Fuel Cells

Hence it would be very beneficial to achieve high efficiency compressor/expander power recovery technology. One way to improve the efficiency of the compressor/expander would be to reduce the pressure requirement. If a passive pressurization process could be provided within the fuel cell itself, at no cost to the power output of the fuel cell, power production from present day fuel cells would be increased by approximately 20%.

Magnetically modified cathodes may reduce the need for pressurization as oxygen is paramagnetic. The field may also alter oxygen kinetics. Potential shifts of +35 mV to +100 mV represent a 5% to 15% improvement in cell efficiency, and comparable savings in weight and volume. Also, in fuel cells, as hydrated protons cross the cell, the cathode floods and the anode dehydrates. Water transport may be throttled by composite separators of graded density and hydration.

Membrane Sensors

Membrane sensors for the paramagnetic gases O_2 , NO_2 , and NO (the latter recently identified as a neurotransmitter)

could be based on magnetic composites where enhanced flux would reduce response times and amplify signals. Sensors for other analytes, where oxygen is an interferant, could distinguish between species by using dual sensors, identical except one sensor incorporates a magnetic field. Examples of these sensors could be optical, gravimetric, or electrochemical, including amperometric and voltammetric. In sensors, the measured signal is proportional to the concentration of all species present to which the sensor responds. The presence of a magnetic component in the sensor will enhance sensitivity to paramagnetic species. Through a linear combination of the signal from two sensors, similar in all respects except one contains a magnetic component, and the sensitivity of the magnetic sensor to paramagnetic species (determined by calibration), it is possible to determine the concentration of the paramagnetic species. In a system where the sensors are only sensitive to one paramagnetic and one diamagnetic species, it is possible to determine the concentration of both species.

Flux Switches

As nanostructured and microstructured materials and machines develop into a technology centered on dynamics in micro-environments, flux switches will be needed. Externally applied magnetic fields can actuate flux switches using electrodes coated with composites made of paramagnetic polymers and Fe/Fe oxide or other non-permanent magnetic material, or internal magnetic fields can actuate flux switches using electrodes coated with composites made of electro-active polymers or liquid crystals, where one redox form is diamagnetic and the other is paramagnetic, and organo-Fe or other superparamagnetic or ferro-fluid materials or permanent magnetic or aligned surface magnetic field material. Also, an external magnet can be used to orient paramagnetic polymers and liquid crystals in a composite containing paramagnetic magnetic beads. Enhanced orientation may be possible with magnetic beads containing superparamagnetic or ferrofluid materials.

Batteries

Batteries with increased current densities and power, as well as decreased charge and discharge times may be made with magnetic bead composites. The improvements would be driven by flux enhancement, transport enhancement, electron kinetic effects, or by capitalizing on a potential shift. The required mass of microbeads would little affect specific power. Since magnetic fields can suppress dendrite formation, secondary battery cycle life may be extended. Examples include magnetically modified electrodes. The magnetic coatings may be on the electrodes or elsewhere in the battery structure.

FIG. 17 is a short summary of steps involved in a method of making an electrode according to two embodiments of the invention. In one embodiment, the method is a method of making an electrode with a surface coated with a magnetic composite with a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode according to one embodiment of the invention. In particular step 702 involves mixing a first component which includes a suspension of at least approximately 1 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent magnetizable material having diameters at least about 0.5 micrometers in a first solvent with a second component comprising at least approximately 2 percent by weight of an ion exchange polymer in a second solvent to

yield a mixed suspension. Step 708 then involves applying the mixed suspension to the surface of the electrode. The electrode is arranged in a magnetic field of at least approximately 0.05 Tesla, wherein the magnetic field has a component oriented approximately along the normal of the electrode surface and preferably is entirely oriented approximately along the normal of the electrode surface. Step 714 then involves evaporating the first solvent and the second solvent to yield the electrode with a surface coated with the magnetic composite having a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode.

Step 702 can include mixing the first component which includes a suspension of between approximately 2 percent and approximately 10 percent by weight of inert polymer coated magnetic microbeads with the second component. Alternatively, step 702 can include mixing the first component which includes inert polymer coated magnetic microbeads containing between 50 percent and 90 percent magnetizable material with the second component. Alternatively, step 702 can include mixing the first component which includes inert polymer coated magnetic microbeads containing 90 percent magnetizable material with the second component.

In addition, step 702 can include mixing a first component which includes a suspension of at least approximately 5 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent magnetizable material having diameters ranging between approximately 0.5 micrometers with a second component and approximately 12 micrometers. Alternatively, step 702 can include mixing a first component which includes a suspension of at least approximately 5 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent magnetizable material having diameters ranging between approximately 0.11 micrometer and approximately 2 micrometers with a second component.

Mixing step 702 can also involve mixing a first component which includes a suspension of at least approximately 5 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent magnetizable material having diameters at least 0.5 micrometers in a first solvent with a second component comprising at least approximately 5 percent by weight of Nafion in a second solvent to yield the mixed suspension.

Step 702 can involve mixing a first component which includes a suspension of at least approximately 5 percent by weight of inert polymer coated magnetic microbeads containing between approximately 10 percent and approximately 90 percent organo-Fe material having diameters at least 0.5 micrometers in a first solvent with a second component comprising at least approximately 5 percent by weight of an ion exchange polymer in a second solvent to yield the mixed suspension.

Step 708 can include applying approximately between 2 percent and approximately 75 percent by volume of the mixed suspension to the surface of the electrode. Alternatively, step 708 can include applying between 25 percent and 60 percent by volume of the mixed suspension to the surface of the electrode. In yet another approach step 708 can involve applying the mixed suspension to the surface of the electrode, the electrode being arranged in a magnetic field between approximately 0.05 Tesla and approximately 2 Tesla and preferably the magnetic field is approximately 2 Tesla.

An alternative embodiment involving steps **702'** through **714'** (also shown in FIG. **17**) involves the use of an external magnetic field. That is, again the method of making an electrode with a surface coated with a composite with a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode when the external magnetic field is turned on. The steps **702** through **714** are then modified into steps **702'** through **714'** as follows. Step **702'** involves mixing a first component which includes a suspension of at least 5 percent by weight of inert polymer coated microbeads containing between 10 percent and 90 percent magnetizable non-permanent magnetic material having diameters at least 0.5 micrometers in a first solvent with a second component comprising at least 5 percent of an ion exchange polymer in a second solvent to yield a mixed suspension. Step **708'** then involves applying the mixed suspension to the surface of the electrode. Step **714'** involves evaporating the first solvent and the second solvent to yield the electrode with a surface coated with the composite having a plurality of boundary regions with magnetic gradients having paths to the surface of the electrode when the external magnet is turned on.

FIGS. **18A** and **18B** show a flux switch **800** to regulate the flow of a redox species according to yet another embodiment of the invention. In particular, FIGS. **18A** and **18B** show an electrode **804** and a coating **808** on the electrode **804**. Coating **808** is formed from a composite which includes magnetic microbead material **812** with an aligned surface magnetic field; an ion exchange polymer **816**; and an electro-active polymer **820** in which a first redox form is paramagnetic and a second redox form is diamagnetic, wherein the flux switch is actuated by electrolyzing the electro-active polymer from the first redox form ordered in the magnetic field established by the coating to the second redox form disordered in the magnetic field.

Microbead material **812** can include organo-Fe material. The redox species can be more readily electrolyzed than the electro-active polymer. Electro-active polymer **820** can be an electro-active liquid crystal with chemical properties susceptible to said magnetic field or an electro-active liquid crystal with viscosity susceptible to said magnetic field. Electro-active polymer **820** includes an electro-active liquid crystal with phase susceptibility to said magnetic field. Electro-active polymer **812** can include poly(vinyl ferrocenium). In addition, the magnetic microbead material **812** can comprise organo-Fe material.

FIG. **19** shows a dual sensor **900** for distinguishing between a first species (particles A) and a second species (particles B) The dual sensor includes a first membrane sensor **906** which preferentially passes the second species over the first species; and a second membrane sensor **912**, which preferentially enhances the concentration of the first species over the second species, thereby enabling the measurement of at least the first species. The first and second species can be in any state such as liquid, gaseous, solid and plasma.

In one embodiment, the first species can include a paramagnetic species and the second species can include a diamagnetic species. In this case, the first membrane sensor **906** is a magnetically modified membrane sensor, and the second membrane sensor **912** is an unmodified membrane sensor. The magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the paramagnetic species over the diamagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the diamagnetic species and the paramagnetic species, enabling the measure-

ment of the concentration of at least the paramagnetic species. More particularly, the paramagnetic species can be one of O₂, NO₂, and NO. The diamagnetic species can be CO₂.

In another embodiment, the first species can include a paramagnetic species and the second species can include a nonmagnetic species. In this case, the first membrane sensor **906** is a magnetically modified membrane sensor, and the second membrane sensor includes an unmodified membrane sensor. The magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the paramagnetic species over the nonmagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the nonmagnetic species and the paramagnetic species, thereby enabling the measurement of the concentration of at least the paramagnetic species. More particularly, the paramagnetic species can be one of O₂, NO₂, and NO.

In yet another embodiment, the first species can include a diamagnetic species and the second species can include a second diamagnetic species. In this case, the first membrane sensor **906** is a magnetically modified membrane sensor, and the second membrane sensor **912** is a differently magnetically modified membrane sensor. The magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the first diamagnetic species over the second diamagnetic species and the differently magnetically modified membrane sensor enhances the concentration of and allows the detection of the second paramagnetic species and the diamagnetic species, enabling the measurement of the concentration of at least the first diamagnetic species. The first diamagnetic species can include CO₂.

In yet another embodiment, the first species can be a first paramagnetic species and the second species can be a second paramagnetic species. In this case, the first membrane sensor **906** is a magnetically modified membrane sensor, and the second membrane sensor **912** is a differently magnetically modified membrane sensor, wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the first paramagnetic species over the second paramagnetic species and the differently magnetically modified membrane sensor enhances the concentration of and allows the detection of the second paramagnetic species and the first paramagnetic species, enabling the measurement of the concentration of at least the first paramagnetic species. Again, the first paramagnetic species can be one of O₂, NO₂, and NO.

In yet another embodiment of the invention, the first species can be a diamagnetic species and the second species can be a nonmagnetic species. In this case, the first membrane sensor **906** is a magnetically modified membrane sensor, and the second membrane sensor **912** is an unmodified membrane sensor, wherein the magnetically modified membrane sensor preferentially enhances the concentration of and allows the detection of the diamagnetic species over the nonmagnetic species and the unmodified membrane sensor enhances the concentration of and allows the detection of the nonmagnetic species and the diamagnetic species, enabling the measurement of the concentration of at least the diamagnetic species.

FIG. **20** shows a cell **201** according to another embodiment of the invention. In particular, FIG. **20** shows an electrolyte **205** including a first type of particles. A first electrode **210** and a second electrode **215** are arranged in electrolyte **205**. The first type of particles transform into a

second type of particles once said first type of particles reach said second electrode **215**. Second electrode **215** has a surface with a coating **225** fabricated according to the above methods. Coating **225** includes a first material **230** having a first magnetism, a second material **234** having a second magnetism, thereby creating a plurality of boundaries (**33** of FIG. 15A) providing a path between said electrolyte **205** and said surface of said second electrode **215**. Each of said plurality of boundaries having a magnetic gradient within said path, said path having an average width of approximately one nanometer to approximately several micrometers, wherein said first type of particles have a first magnetic susceptibility and said second type of particles have a second magnetic susceptibility and the first and said second magnetic susceptibilities are different. Coating **225** operates in the manner described with respect to FIG. 16.

First material **230** in coating **225** can include a paramagnetic species and second material **234** can include a diamagnetic species. Alternatively, first material **230** can include a paramagnetic species having a first magnetic susceptibility and second material **234** can include a paramagnetic species having a second magnetic susceptibility, and said first magnetic susceptibility is different from said second magnetic. In yet another approach, first material **230** can include a diamagnetic species having a first magnetic susceptibility while second material **234** includes a diamagnetic species having a second magnetic susceptibility, and said first magnetic susceptibility is different from said magnetic second susceptibility. In another approach, first material **230** could alternatively include a paramagnetic species having a first magnetic susceptibility and second material **234** comprises a nonmagnetic species. In another approach, first material **230** can include a diamagnetic species having a first magnetic susceptibility and second material **234** can include a nonmagnetic species. Electrolyte **205** can be an electrolyzable gas such as O₂ or can include a chloro-alkali.

Numerous and additional modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically claimed.

What is claimed is:

1. A method for forming a graded density magnetic composite, comprising:

contacting a surface with a composition comprising a magnetic material to form a magnetic material coated surface;

applying to the magnetic material coated surface at least a first polymer solution comprising at least one polymer, having a first concentration, and a first solvent, and evaporating the first solvent to form a first polymer coating on said magnetic material coated surface;

applying to the first polymer coating a second polymer solution comprising at least one polymer, having a second concentration different from the first polymer solution concentration, and a second solvent, and evaporating the second solvent to form a second polymer coating on the first polymer coating, and thereby yield the graded density magnetic composite.

2. The method of claim 1, further comprising:

applying to the second polymer coating a third polymer solution comprising at least one polymer, having a third concentration different from at least one of the first and second polymer solution concentrations, and a third solvent, and

evaporating the third solvent to form a third polymer coating on the second polymer coating, and thereby yield the graded density magnetic composite.

3. The method of claim 2, further comprising:

applying to the third polymer coating a fourth polymer solution comprising at least one polymer, having a fourth concentration different from at least one of the first, second and third polymer solution concentrations, and a fourth solvent, and

evaporating the fourth solvent to form a fourth polymer coating on the third polymer coating, and thereby yield the graded density magnetic composite.

4. The method of claim 1 wherein the at least one polymer comprises one of a density gradient polymer and an ion exchange polymer.

5. The method of claim 1 wherein the first polymer concentration ranges from about 2% by weight to about 50% by weight and the second polymer concentration ranges from about 2% by weight to about 50% by weight.

6. The method of claim 1 wherein applying at least one of the first and second polymer solutions comprises spin casting.

7. The method of claim 1 wherein the graded density magnetic composite includes a graded parallel to the surface.

8. The method of claim 1 further comprising removing the graded density magnetic composite from the surface to yield a free-standing composite.

9. The method of claim 1 further comprising arranging the surface in an external magnetic field.

10. The method of claim 9 wherein the magnetic field is non-uniform.

11. The method of claim 9 further comprising removing the magnetic field after applying the at least first and second polymer solutions.

12. The method of claim 9 wherein the at least first and second polymer solutions are applied and the magnetic field is applied such that the magnetic composite includes a magnetic gradient in a first coordinate and a density gradient in a second coordinate.

13. The method of claim 1 wherein the at least first polymer solution comprises a mixture of an ion-exchange polymer and a density gradient polymer.

14. The method of claim 1 wherein the at least first polymer solution comprises a density gradient polymer, and further comprising the step of adsorbing an ion exchange polymer into the density gradient polymer.

15. The method of claim 8, wherein said free-standing composite comprises a film.

16. A method of making a graded density magnetic composite, comprising:

forming a magnetic material coated surface; and

applying to the magnetic material coated surface a plurality of successively formed coatings, each being formed by:

applying a respective polymer solution comprising at least one polymer, having a respective polymer concentration, and a respective solvent, and evaporating the respective solvent,

wherein said respective polymer concentrations are not all identical, thereby yielding the graded density magnetic composite.

17. The method of claim 16, wherein said respective polymer concentrations are varied to form a monotonic graded density on said magnetic material coated surface with respect to said at least one polymer.

18. The method of claim 16, wherein said respective polymer concentrations are varied to form an approximately

35

discontinuously graded, density on said magnetic material coated surface with respect to said at least one polymer.

19. The method of claim 16, wherein said at least one polymer comprises at least one of a density gradient polymer and an ion exchange polymer.

20. The method of claim 16, wherein said respective polymer concentration ranges from about 2% to about 50% by weight.

21. The method of claim 16, wherein said successively applying said respective polymer solution comprises spin casting.

22. The method of claim 16, wherein said graded density magnetic composite comprises a graded density parallel to the surface.

23. The method of claim 16, further comprising removing said graded density magnetic composite from said magnetic material coated surface to yield a free-standing composite film.

24. The method of claim 16, further comprising forming said magnetic material coated surface in an external magnetic field.

36

25. The method of claim 24, wherein said magnetic field is non-uniform.

26. The method of claim 24, further comprising removing said magnetic field after said successively applying said respective polymer solution.

27. The method of claim 24, wherein said respective polymer solution is successively applied, and the magnetic field is applied such that the magnetic composite includes a magnetic gradient in a first coordinate, and a density gradient in a second coordinate.

28. The method of claim 17, wherein said respective polymer solution comprises a mixture of an ion exchange polymer and a density gradient polymer.

29. The method of claim 17, wherein said respective polymer solution comprises a density gradient polymer, and further comprising the step of adsorbing an ion exchange polymer into the layer formed by the density gradient polymer.

* * * * *